


UNBRAKED AXLE 750 KG BASIC

Modern, maintenance-free axle technology "Made in Germany"



THE ADVANTAGES FOR YOU

Hollow swing arm for greater ride comfort. The lightweight swingarm is produced with maximum quality in the latest production facilities.

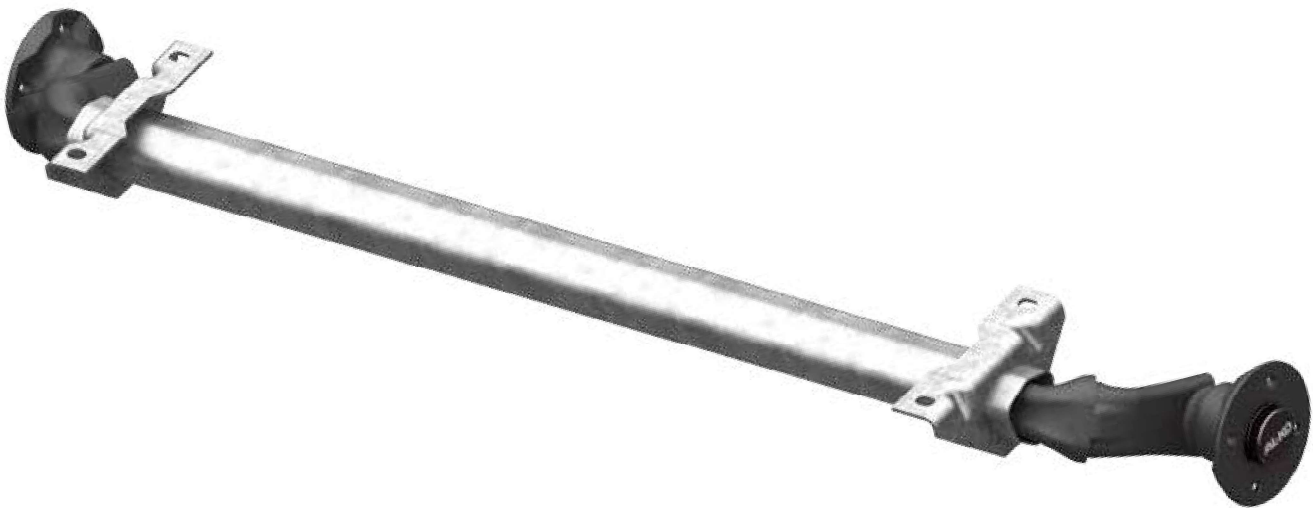

PERMANENTLY WATERTIGHT COMPACT BEARING FOR BOAT TRAILERS (OPTIONAL)

The seal is achieved directly **in the compact bearing** by radial shaft seals with tried-and-tested AL-KO quality.




HUB VARIANTS AND POSSIBLE WHEEL CONNECTIONS


	Offset From – to	Additional weight Per axle	Possible wheel connections										
			100x4	98x4	101.6x4	115x4	130x4	108x4	108x5	112x5	114.3x5	120x5	130x5
Standard hub	27–45 mm		X	X	X								
Universal hub	27–45 mm	2.8 kg				X	X	X	X	X	X	X	X

If the offset values are exceeded or undershot, the bearing service life will be reduced.

HUB WITH INTEGRATED SPLASH GUARD "LABYRINTH"

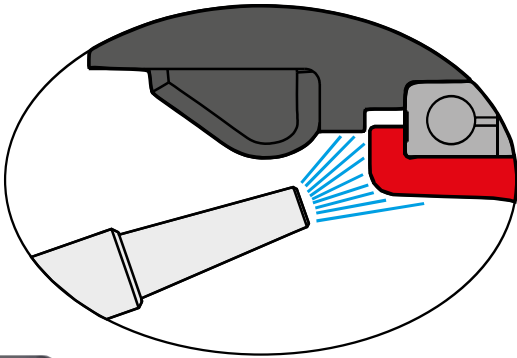

- || The bearing is protected by the shape of the hub and the axle stub (labyrinth)
- || This means dirt and dust cannot act directly on the bearing
- || When cleaning with a high-pressure cleaner, the water jet does not act directly on the bearing

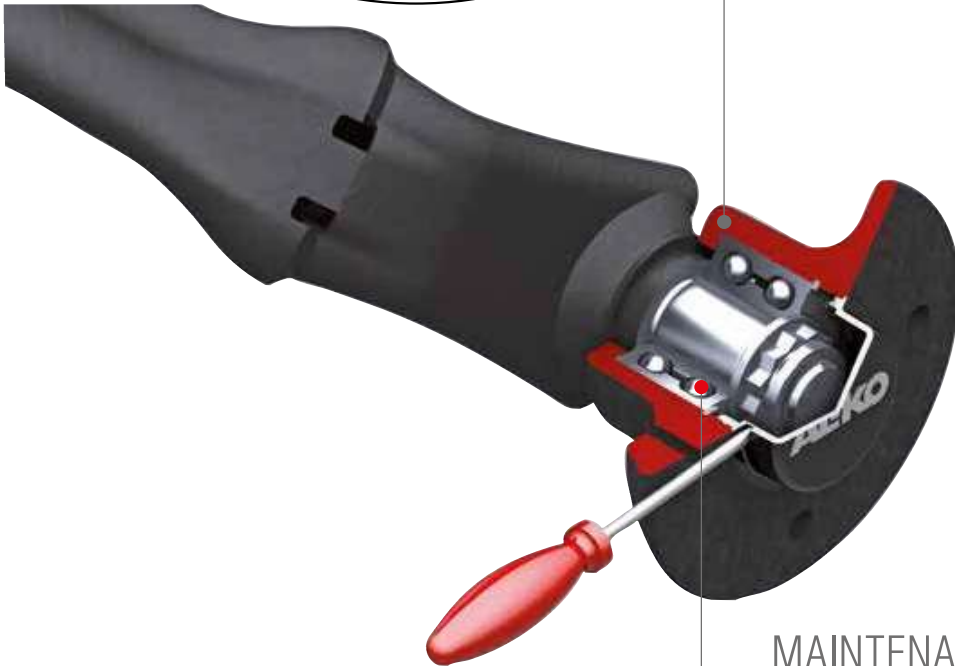

MAINTENANCE-FREE COMPACT BEARING (AS STANDARD)

- || Fill-for-life lubrication
- || There is no longer any need to set or readjust the bearing during servicing



DUST CAP WITH INTEGRATED SEAL

A soft plastic is used between the hub and dust cap to provide a sealing function and additional protection for the bearing.