

UNBRAKED AXLE 750 KG BASIC

100x4, 112x5



TECHNOLOGY

Model: BASIC
 Axle type: 700-5
 Axle load: SA 750 kg
 Suspension: Hexagonal rubber suspension

Swing arm length: 145 mm
 Wheel connection: 100x4, 112x5
 Wheel bearing: Compact bearing
 Rim centre hole: Min. 57 mm

IMPORTANT!

These axles cannot be combined with 8" complete wheels!



SAP: ACHSE GU UBR EA 750 OPTIMA

Single axle

Wheel bolts Taper M 12x1.5 100x4	Wheel bolts Ball M 12x1.5 112x5	Wheel bolts Taper M 12x1.5 100x4 Watertight axle cpl.	Wheel bolts Ball M 12x1.5 112x5 Watertight axle cpl.							
Axle cpl.	Axle cpl.			OHF in mm	BC in mm	100x4	112x5			
200 596 01	200 596 48	200 600 01	200 600 25	1,130	700	17	20	–	50	10
200 596 02	200 596 49	200 600 02	200 600 26	1,180	750	17	20	–	50	10
200 596 03	200 596 50	200 600 03	200 600 27	1,230	800	18	20	–	50	10
200 596 04	200 596 51	200 600 04	200 600 28	1,280	850	18	21	–	50	10
200 596 05	200 596 52	200 600 05	200 600 29	1,330	900	18	21	–	50	10
200 596 06	200 596 53	200 600 06	200 600 30	1,380	950	18	21	–	50	10
1 422 671	200 596 54	200 600 07	200 600 31	1,430	1,000	19	21	–	50	2
200 596 07	200 596 55	200 600 08	200 600 32	1,480	1,050	19	22	–	50	10
200 596 08	200 596 56	200 600 09	200 600 33	1,530	1,100	19	22	–	50	10
200 596 09	200 596 57	200 600 10	200 600 34	1,580	1,150	19	22	–	50	10
200 596 10	200 596 58	200 600 11	200 600 35	1,630	1,200	19	22	–	50	2
200 596 11	200 596 59	200 600 12	200 600 36	1,680	1,250	20	22	–	50	10
200 596 12	200 596 60	200 600 13	200 600 37	1,730	1,300	20	23	–	50	10
200 596 13	200 596 61	200 600 14	200 600 38	1,780	1,350	20	23	–	50	10
200 596 14	200 596 62	200 600 15	200 600 39	1,830	1,400	20	23	–	50	10
200 596 15	200 596 63	200 600 16	200 600 40	1,880	1,450	20	23	–	50	10
200 596 16	200 596 64	200 600 17	200 600 41	1,930	1,500	21	23	–	50	10
200 596 17	200 596 65	200 600 18	200 600 42	1,980	1,550	21	24	–	50	10
200 596 18	200 596 66	200 600 19	200 600 43	2,030	1,600	21	24	–	50	10
200 596 19	200 596 67	200 600 20	200 600 44	2,080	1,650	21	24	–	50	10
200 596 20	200 596 68	200 600 21	200 600 45	2,130	1,700	21	24	–	50	10
200 596 21	200 596 69	200 600 22	200 600 46	2,180	1,750	22	24	–	50	10
200 596 22	200 596 70	200 600 23	200 600 47	2,230	1,800	22	25	–	50	10
200 596 23	200 596 71	200 600 24	200 600 48	2,280	1,850	22	25	–	50	10

SCOPE OF DELIVERY


|| Wheel bolts loose

SURFACE TREATMENT

|| Axle profile hot-dip galvanised

Clamp for drawbar tube $\square 60$

Part no. 267 395

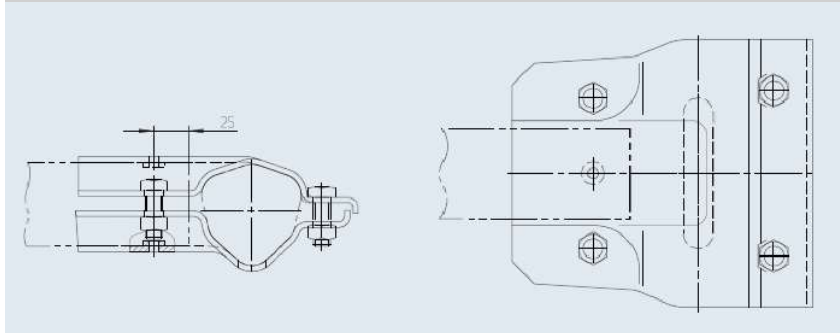

4

Single axle

