

UNBRAKED AXLE 1,000 KG BASIC

100x4, 112x5



TECHNOLOGY

Model: BASIC
 Axle type: UBR 850-10
 Axle load: SA 1,000 kg
 Suspension: Hexagonal rubber suspension
 Swing arm: 158 mm
 Wheel connection: 100x4, 112x5
 Wheel bearing: Compact bearing
 Rim centre hole: Min. 57 mm

SCOPE OF DELIVERY

▮ Wheel bolts loose
 ▮ Operating instructions


SURFACE TREATMENT

▮ Axle profile hot-dip galvanised




SAP: ACHSE GU UBR EA 1000 PLUS

			Single axle 100x4				Single axle 112x5				
OHF in mm	BC in mm	Wheel bolts Taper M 12x1.5					Wheel bolts Ball M 12x1.5				
		Axle cpl.					Axle cpl.				
1,200	750	200 562 01	29	—	30	10	200 560 01	29	—	30	10
1,250	800	200 562 02	29	—	30	10	200 560 02	29	—	30	10
1,300	850	200 562 03	29	—	30	10	200 560 03	29	—	30	10
1,350	900	200 562 04	30	—	30	10	200 560 04	30	—	30	10
1,400	950	200 562 05	30	—	30	10	200 560 05	30	—	30	10
1,450	1,000	200 562 06	30	—	30	10	200 560 06	30	—	30	10
1,490	1,040	200 562 07	30	—	30	10	200 560 07	30	—	30	10
1,520	1,070	200 562 08	31	—	30	10	200 560 08	31	—	30	10
1,550	1,100	200 562 09	31	—	30	10	200 560 09	31	—	30	10
1,600	1,150	200 562 10	31	—	30	10	200 560 10	31	—	30	10
1,650	1,200	200 562 11	31	—	30	10	1 222 783	31	—	30	10
1,670	1,220	200 562 12	32	—	30	10	200 560 11	32	—	30	10
1,700	1,250	200 562 13	32	—	30	10	200 560 12	32	—	30	10
1,760	1,310	200 562 14	32	—	30	10	200 560 13	32	—	30	10
1,800	1,350	200 562 15	32	—	30	10	200 560 14	32	—	30	10
1,850	1,400	200 562 16	32	—	30	10	200 560 15	32	—	30	10
1,900	1,450	200 562 17	33	—	30	10	200 560 16	33	—	30	10
1,950	1,500	200 562 18	33	—	30	10	200 560 17	33	—	30	10
1,980	1,530	200 562 19	33	—	30	10	200 560 18	33	—	30	10
2,000	1,550	200 562 20	33	—	30	10	200 560 19	33	—	30	10
2,030	1,580	200 562 21	33	—	30	10	200 560 20	33	—	30	10
2,075	1,625	200 562 22	34	—	30	10	200 560 21	34	—	30	10
2,120	1,670	200 562 23	34	—	30	10	200 560 22	34	—	30	10
2,150	1,700	200 562 24	34	—	30	10	200 560 23	34	—	30	10
2,200	1,750	200 562 25	34	—	30	10	200 560 24	34	—	30	10
2,250	1,800	200 562 26	34	—	30	10	200 560 25	34	—	30	10
2,300	1,850	200 562 27	34	—	30	10	200 560 26	34	—	30	10
2,350	1,900	200 562 28	34	—	30	10	200 560 27	34	—	30	10

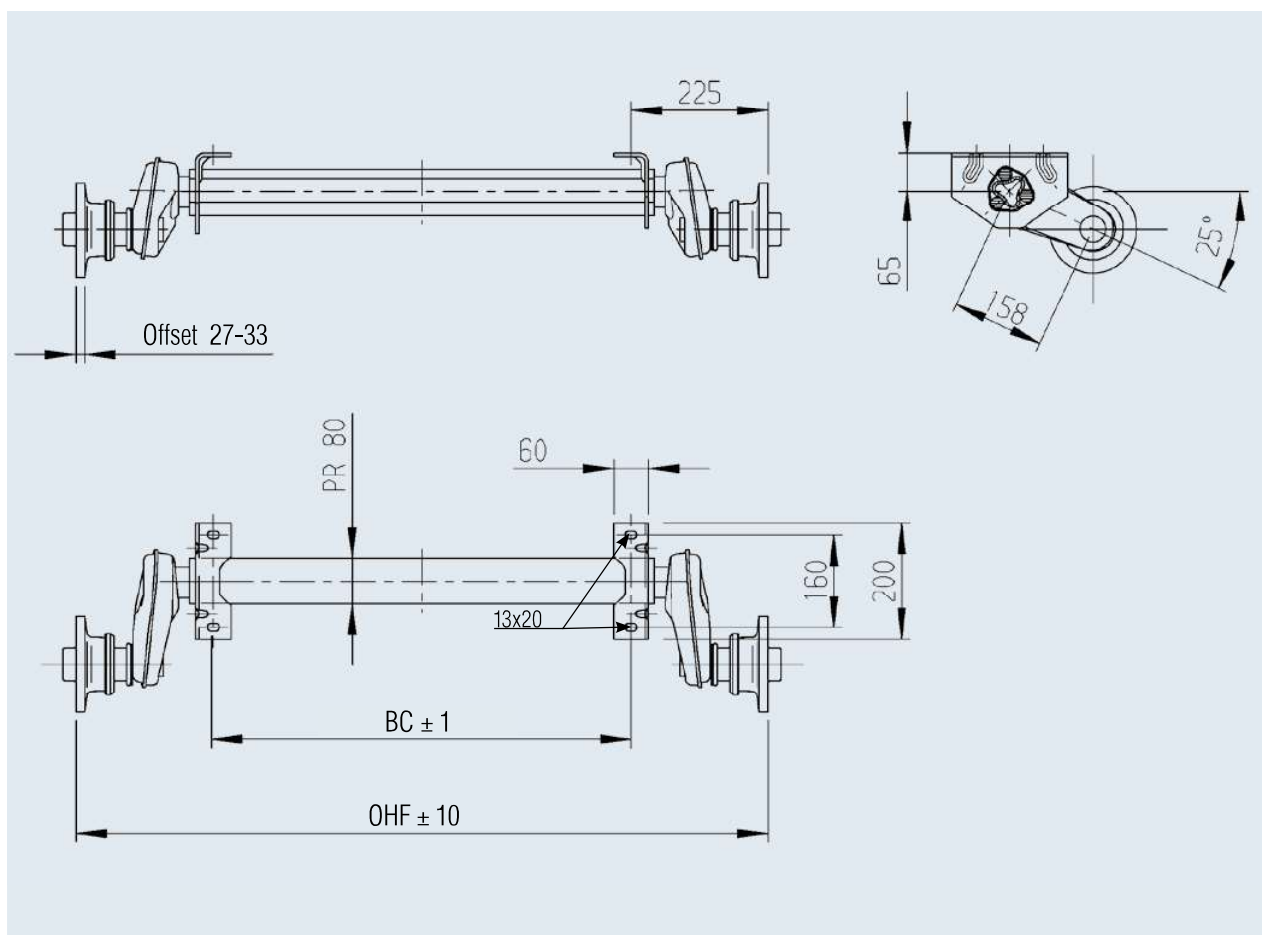

Accessories for bolt-on drawbar connection profiles


Part no. 247 853

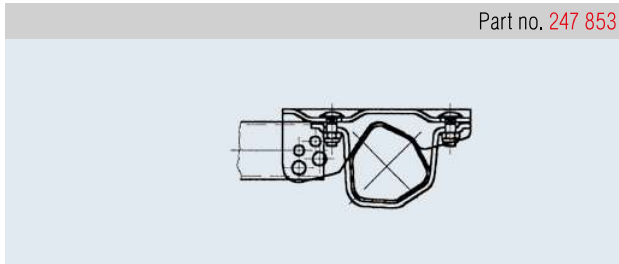

Possible drawbar connection profiles:

□ 60x60

Part no. 249 116

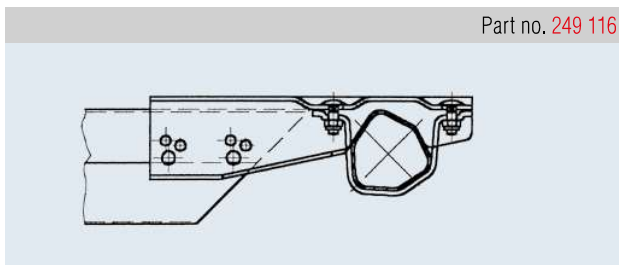

Possible drawbar connection profiles:

□ 70.1 V0

□ 75 VU

□ 102 VB