

UNBRAKED AXLE 1,300 KG BASIC

112x5



TECHNOLOGY

Model: BASIC
 Axle type: UBR 1200-5
 Axle load: SA 1,300 kg
 Suspension: Hexagonal rubber suspension
 Swing arm: 161.5 mm
 Wheel connection: 112x5
 Wheel bearing: Compact bearing
 Rim centre hole: Min. 57 mm

SCOPE OF DELIVERY

┃ Wheel bolts loose
 ┃ Operating instructions

SURFACE TREATMENT

┃ Axle profile hot-dip galvanised




SAP: ACHSE GU UBR EA 1300 PLUS

Single axle 112x5


Wheel bolts

Ball M 12x1.5

Axle cpl.	OHF in mm	BC in mm				
200 561 01	1,200	750	33	—	30	10
200 561 02	1,250	800	33	—	30	10
200 561 03	1,300	850	33	—	30	10
200 561 04	1,350	900	34	—	30	10
200 561 05	1,400	950	34	—	30	10
1 222 364	1,450	1,000	34	—	30	10
200 561 06	1,490	1,040	34	—	30	10
200 561 07	1,520	1,070	35	—	30	10
200 561 08	1,550	1,100	35	—	30	10
200 561 09	1,600	1,150	35	—	30	10
200 561 10	1,650	1,200	35	—	30	10
200 561 11	1,670	1,220	36	—	30	10
200 561 12	1,700	1,250	36	—	30	10
200 561 13	1,760	1,310	36	—	30	10
200 561 14	1,800	1,350	36	—	30	10
200 561 15	1,850	1,400	36	—	30	10
200 561 16	1,900	1,450	37	—	30	10
200 561 17	1,950	1,500	37	—	30	10
200 561 18	1,980	1,530	37	—	30	10
200 561 19	2,000	1,550	37	—	30	10
200 561 20	2,030	1,580	37	—	30	10
200 561 21	2,075	1,625	38	—	30	10
200 561 22	2,120	1,670	38	—	30	10
200 561 23	2,150	1,700	38	—	30	10
200 561 24	2,200	1,750	38	—	30	10
200 561 25	2,250	1,800	38	—	30	10
200 561 26	2,300	1,850	38	—	30	10
200 561 27	2,350	1,900	38	—	30	10

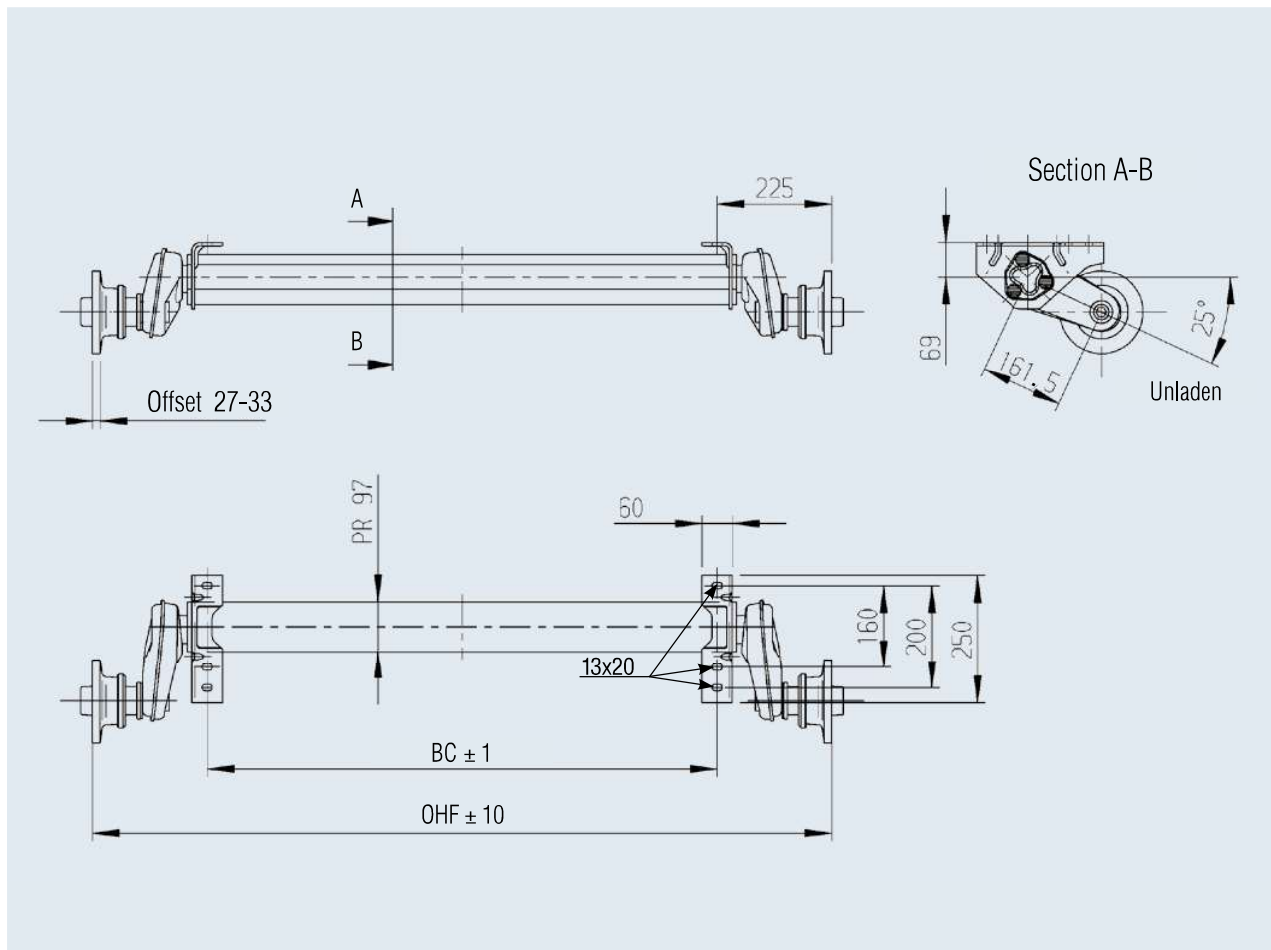


Accessories for bolt-on drawbar connection profiles

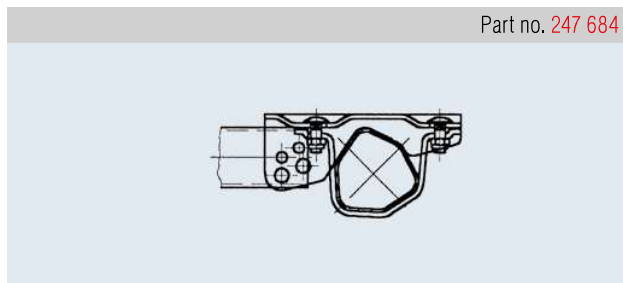

Possible drawbar connection profiles:

- I Ø 70
- I Ø 88.9
- I Ø 101.6
- I □ 60x60
- I □ 70x70
- I □ 100x100

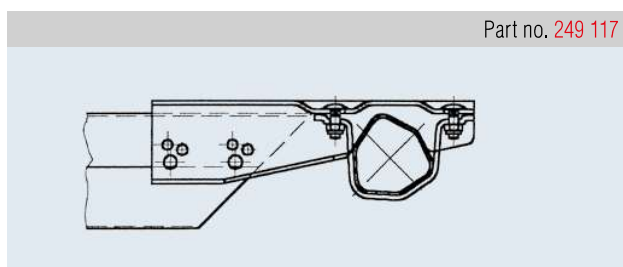

Possible drawbar connection profiles:

- I □ 80x140
- I □ 80x160
- I □ 100x160
- I □ 100x177
- I □ 120x120
- I □ 120x160
- I □ 120x177