

UNBRAKED AXLE 1,500 KG BASIC

112x5



TECHNOLOGY

Model: BASIC
 Axle type: 1600-3
 Axle load: SA 1,500 kg
 Wheel connection: 112x5
 Suspension: Hexagonal rubber suspension
 Swing arm: 161.5 mm
 Wheel bearing: Compact bearing
 Rim centre hole: Min. 57 mm

SCOPE OF DELIVERY

▮ Wheel bolts loose
 ▮ Operating instructions

SURFACE TREATMENT

▮ Axle profile hot-dip galvanised




SAP: ACHSE GU UBR EA 1500 PLUS

Single axle 112x5

Wheel bolts


Ball M 12x1.5

Axle cpl.	OHF in mm	BC in mm				
200 569 01	1,200	750	33	—	30	10
200 569 02	1,250	800	33	—	30	10
200 569 03	1,300	850	33	—	30	10
200 569 04	1,350	900	34	—	30	10
200 569 05	1,400	950	34	—	30	10
1 421 519	1,450	1,000	34	—	30	10
200 569 06	1,490	1,040	34	—	30	10
200 569 07	1,520	1,070	35	—	30	10
200 569 08	1,550	1,100	35	—	30	10
200 569 09	1,600	1,150	35	—	30	10
200 569 10	1,650	1,200	35	—	30	10
200 569 11	1,670	1,220	36	—	30	10
200 569 12	1,700	1,250	36	—	30	10
200 569 13	1,760	1,310	36	—	30	10
200 569 14	1,800	1,350	36	—	30	10
200 569 15	1,850	1,400	36	—	30	10
200 569 16	1,900	1,450	37	—	30	10
200 569 17	1,950	1,500	37	—	30	10
200 569 18	1,980	1,530	37	—	30	10
200 569 19	2,000	1,550	37	—	30	10
200 569 20	2,030	1,580	37	—	30	10
200 569 21	2,075	1,625	38	—	30	10
200 569 22	2,120	1,670	38	—	30	10
200 569 23	2,150	1,700	38	—	30	10
200 569 24	2,200	1,750	38	—	30	10
200 569 25	2,250	1,800	38	—	30	10
200 569 26	2,300	1,850	38	—	30	10
200 569 27	2,350	1,900	38	—	30	10

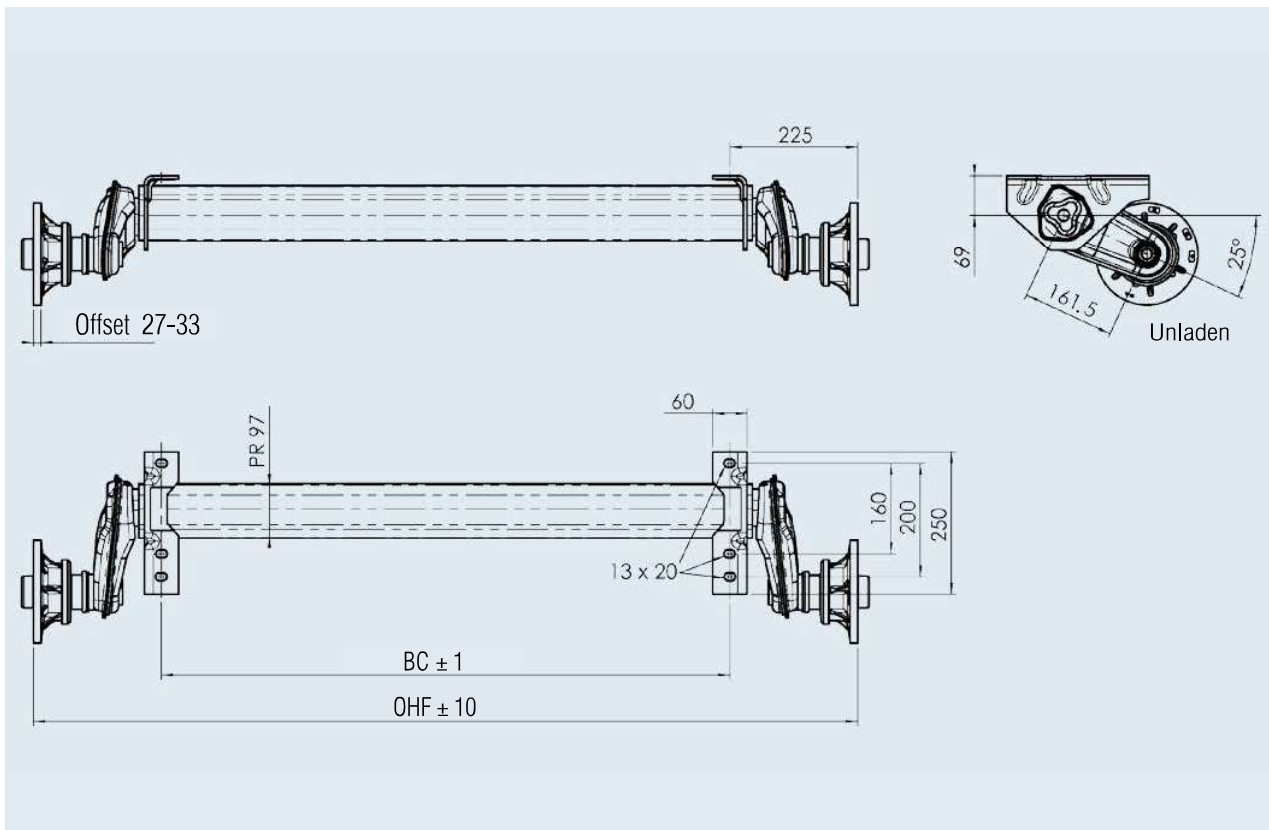

Accessories for bolt-on drawbar connection profiles


Part no. 247 684



Possible drawbar connection profiles:

- I Ø 70
- I Ø 88.9
- I Ø 101.6
- I □ 60x60
- I □ 70x70
- I □ 100x100

Part no. 249 117

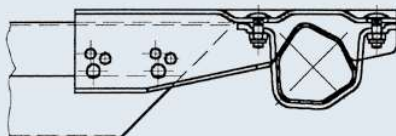

Possible drawbar connection profiles:

- I □ 80x140
- I □ 80x160
- I □ 100x160
- I □ 100x177
- I □ 120x120
- I □ 120x160
- I □ 120x177