

# HEIGHT-ADJUSTABLE OVERRUN DEVICES

## 351 VB-2 OPTIMA with drawbar section cranked 2,500 to 3,500 kg

### TECHNOLOGY

#### Type overrun device 351 VB-2 OPTIMA

Intermediate piece with drawbar section 352 VB-2 OPTIMA

Permissible nose load with DIN eye 350 kg

with coupling head 350 kg



#### ECE test report no.:

Overrun device: 361-118-12

#### ECE type approval no.:

Drawbar installation: E1 55R-01 1233

Changeover relay lever:

Yes  No













**SAP:** AE ZSHB 351-2 OPTIMA M DEICHSPR

#### Overrun device cpl. with drawbar section mounted (without hitch components)

Intermedi- ate piece in mm	Drawbar length E in mm Cranked	Total length K at -5° DIN drawbar eye Cranked	AE cpl. with drawbar section for wheel brake 2051 Cranked	AE cpl. with drawbar section for wheel brake 2361 Cranked	AE cpl. with drawbar section for wheel brake 3081/3062 Cranked				
700	1,410	2,845	200 595 43	200 595 01	200 595 22	132	–	3	10
700	1,490	2,925	200 595 44	200 595 02	200 595 23	134	–	3	10
700	1,570	3,005	200 595 45	200 595 03	200 595 24	136	–	3	10
700	1,650	3,085	200 595 46	200 595 04	200 595 25	138	–	3	10
700	1,730	3,165	200 595 47	200 595 05	200 595 26	140	–	3	10
700	1,810	3,245	200 595 48	200 595 06	200 595 27	143	–	3	10
700	1,890	3,325	200 595 49	200 595 07	200 595 28	145	–	3	10
700	1,970	3,405	200 595 50	200 595 08	200 595 29	147	–	3	10
700	2,050	3,485	200 595 51	200 595 09	200 595 30	149	–	3	10
700	2,130	3,565	200 595 52	200 595 10	200 595 31	151	–	3	10
700	2,210	3,645	200 595 53	200 595 11	200 595 32	154	–	3	10
700	2,290	3,725	200 595 54	200 595 12	200 595 33	156	–	3	10
700	2,370	3,805	200 595 55	200 595 13	200 595 34	158	–	3	10
700	2,450	3,885	200 595 56	200 595 14	200 595 35	160	–	3	10
700	2,530	3,965	200 595 57	200 595 15	200 595 36	162	–	3	10
700	2,610	4,045	200 595 58	200 595 16	200 595 37	165	–	3	10
700	2,690	4,125	200 595 59	200 595 17	200 595 38	167	–	3	10
700	2,770	4,205	200 595 60	200 595 18	200 595 39	169	–	3	10
700	2,850	4,285	200 595 61	200 595 19	200 595 40	171	–	3	10
600	1,410	2,746	–	200 595 20	200 595 41	128	–	3	10
400	1,410	2,546	–	200 595 21	200 595 42	118	–	3	10

**Push-on hitch components: Drawbar eyes nose load 350 kg, connection D60 / 351 VB**

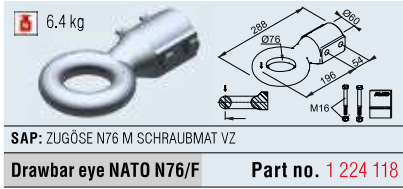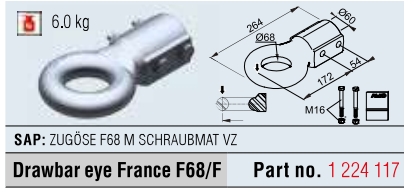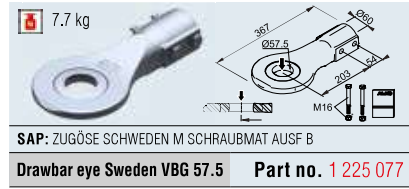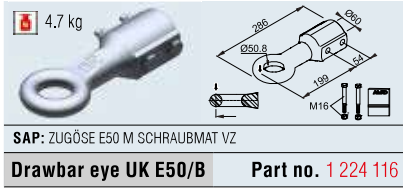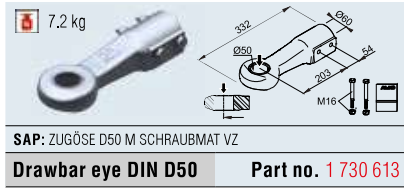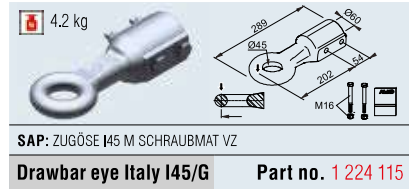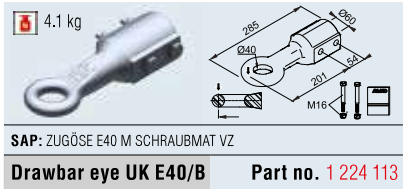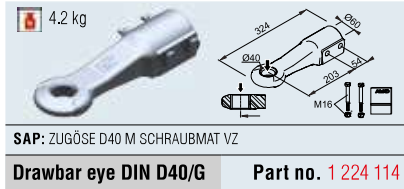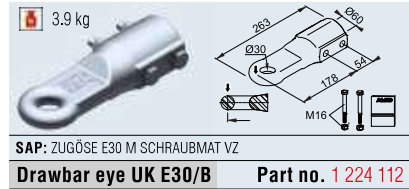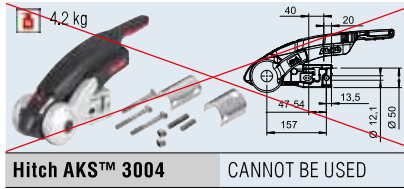

**3**

**Overrun device cpl. with drawbar section mounted (without hitch components)**

