


# MUDGUARDS

Single axle trailer, without mud flap




**SA 140**

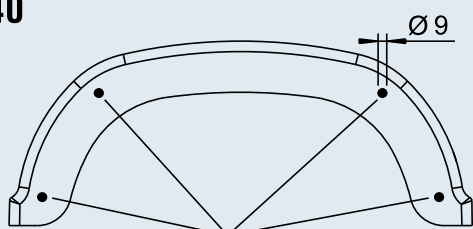


Recommended fixing holes!

Area for customer logo (optional)

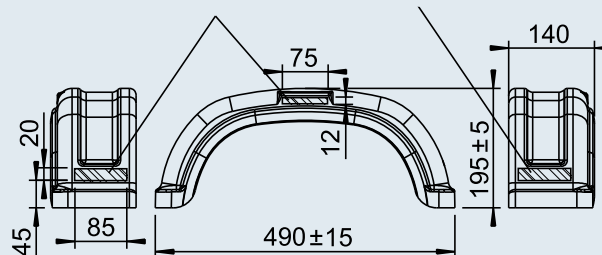


**SA 190**

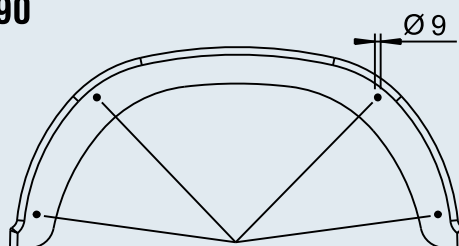


Recommended fixing holes!

Area for customer logo (optional)

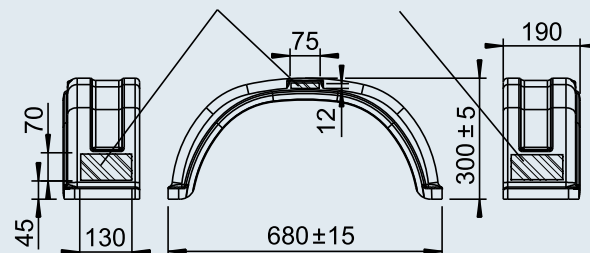


**SA 200**

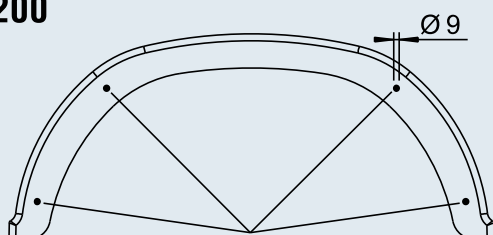


Recommended fixing holes!

Area for customer logo (optional)

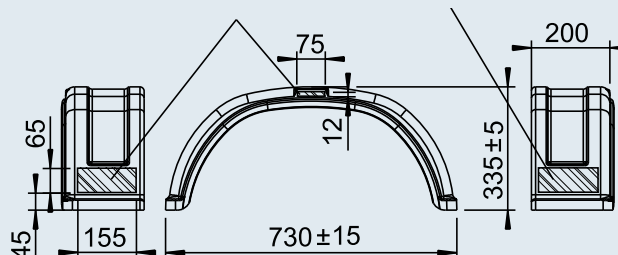


## SA 220

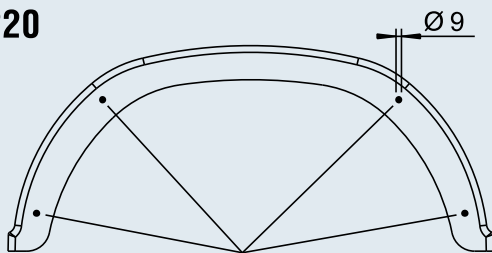



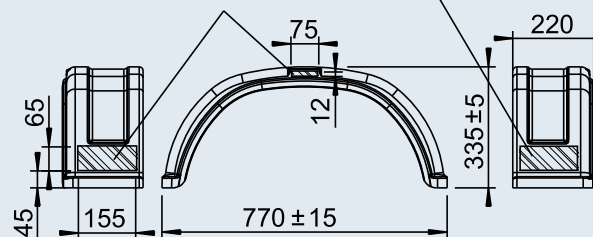

Recommended fixing holes!

Area for customer logo (optional)



11

### BASIC mudguard, single axle trailer, without mud flap

Type	Part no.	SAP	Process	RAL colour	max. perm. tyre radius				
SA 140	1 258 169	KOTFLUEGEL-RK EA140/490	injection-moulded	Similar to black RAL 9017	203 mm	0.41	–	100	2
SA 190	1 258 171	KOTFLÜGEL-RK EA190/680	injection-moulded	Similar to black RAL 9017	283 mm	0.80	–	60	2
SA 200	1 257 130	KOTFLÜGEL-RK EA200/730	injection-moulded	Similar to black RAL 9017	300 mm	0.87	–	75	2
SA 220	1 257 131	KOTFLÜGEL-RK EA220/ 770 O BOHRUNGEN	injection-moulded	Similar to black RAL 9017	325 mm	0.87	–	45	2