


# MUDGUARDS


Tandem, mounted with mud flap



**TA 200**

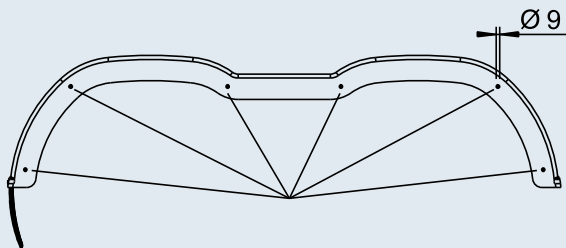

Recommended fixing holes!

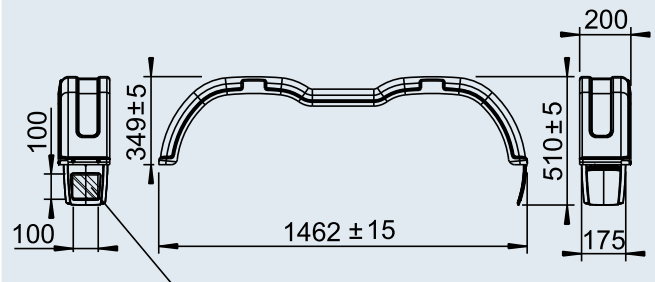

Area for customer logo (optional)

## BASIC mudguard, tandem, mounted with mud flap

Type	Part no.	SAP	For driving direction	Process	RAL colour	max. perm. tyre radius				
<b>TA 200</b>	1 259 345	KOTFLÜGEL TA20146 SL LI	Left	deep-drawn	Similar to black RAL 9017	335 mm	1.92	–	21	20
<b>TA 200</b>	1 259 346	KOTFLÜGEL TA20146 SL RE	Right	deep-drawn	Similar to black RAL 9017	335 mm	1.92	–	21	20