

9. JOCKEY WHEELS



JOCKEY WHEELS

Product differentiation 426

AL-KO jockey wheels

Ø 48 mm	427 – 432
Ø 60 mm	433 – 434
Ø 73 mm	435
Ø 70 mm	436
Accessories for jockey wheels	437 – 439

Winterhoff jockey wheels

Ø 35 mm	440
Ø 48 mm	440 – 445
Ø 60 mm	445 – 451
Ø 70 mm	452 – 453
Accessories for jockey wheels	454 – 459

JOCKEY WHEELS

Product differentiation

Jockey wheels are used in diverse areas

You're spoiled for choice with our extensive range of products and features. To make the choice easier, the following symbols specify product group, additional uses and product characteristics.



Long design
More adjustment range (adjustable stroke)



Rotation lock
Prevents loss while driving



Fully automatic
Wheel is pivoted up fully automatically



Electrogalvanised
Standard corrosion protection



Anti-slip device
Prevents slipping in the clamp



Wheel is removable



Hot-dip galvanised
High-quality corrosion protection



Nose load scale
Displays nose load on the coupling point



Swing arm suspension
Cushions ground irregularities



Crank with thrust block
Easier to use the crank



Grease nipple
Ensures smooth operation



Wheel load scale
Displays wheel load on the wheel



Removable crank
Removable crank prevents unintentional operation



Manual operation
Pivoting the wheel up by hand



Wheel stop
Blocks the wheel



Folding crank
Space-saving



Foot operation
Pivoting the wheel up by foot



BASIC PRODUCT LINE

The **BASIC** products are entirely solid and robust.

They are characterised by very good processing properties for the respective area of use, and are essential in day-to-day trailer use, as they fulfil the basic needs of the trailer users.

We ensure that these Basic variants also meet our high quality standards and exceed the legal minimum requirements.



PLUS PRODUCT LINE

The products from the **PLUS** category boast high quality of finishing, reliability, high-quality materials and longevity. Their high level of stability and smart technical details fulfil the high requirements in the day-to-day use of trailers.

All products have extended functions and are nevertheless user-friendly and have an attractive design.



PREMIUM PROFI PRODUCT LINE

PREMIUM PROFI products are characterised by trail-blazing design, sophisticated functions and top quality. They are innovative and traditional products for the highest demands and challenging areas of application. They are the gold standard

in terms of processing, material and design. Their longevity ensures that you will have many years of joy with these products.

COMPACT JOCKEY WHEELS

Ø 48 mm, max. 150 kg



YOUR ADVANTAGE


| Normal corrosion protection

Galvanised, coat thickness 8 µm.

| Short version



Zn

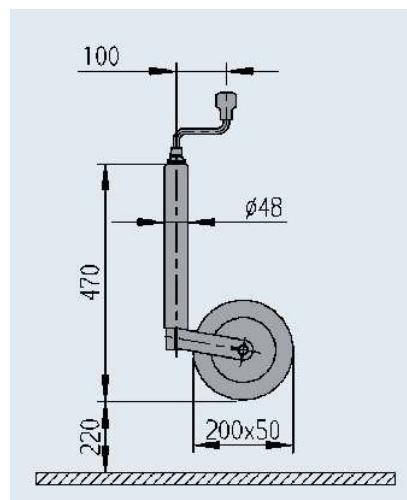

SAP: STÜTZRAD48COM 150KG 200X50KS-FELGE


Jockey wheel Compact

Part no.	1 222 433
Stationary nose load	Max. 150 kg
Nose load when manoeuvring	Max. 90 kg
Rim	Plastic
Wheel	200 x 50 solid rubber
Extended length	220 mm
	4.8 kg
	— 125 units

9



Zn

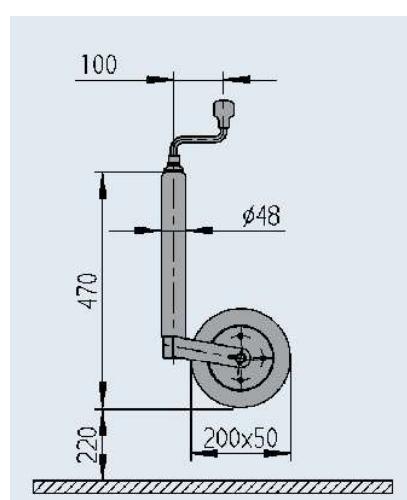

SAP: STÜTZRAD48COM 150KG 200X50ST-FELGE

Jockey wheel Compact

Part no.	1 222 434
Stationary nose load	Max. 150 kg
Nose load when manoeuvring	Max. 90 kg
Rim	steel
Wheel	200 x 50 solid rubber
Extended length	220 mm
	4.8 kg
	— 125 units

JOCKEY WHEEL WITH PINSTOP

Ø 48 mm, max. 150 kg



YOUR ADVANTAGE

The AL-KO PINSTOP is a parking assistance system for small unbraked and braked trailers on relatively even ground. The legislator only specifies 2 wheel chocks as of a gross weight of 750 kg.

The effect depends on the nose load, ground composition and gross trailer weight. Therefore, we recommend always conducting a function check after you have activated the PINSTOP on your trailer.


IMPORTANT!

The PINSTOP does not replace a handbrake or the obligation to secure trailers weighing over 750 kg with wheel chocks.



OPERATION

Move the PINSTOP by hand or with your foot to the corresponding position. When doing this, the locking pin is moved into the indentation in the rim by spring force, thereby stopping the wheel from turning and preventing the trailer from rolling away.

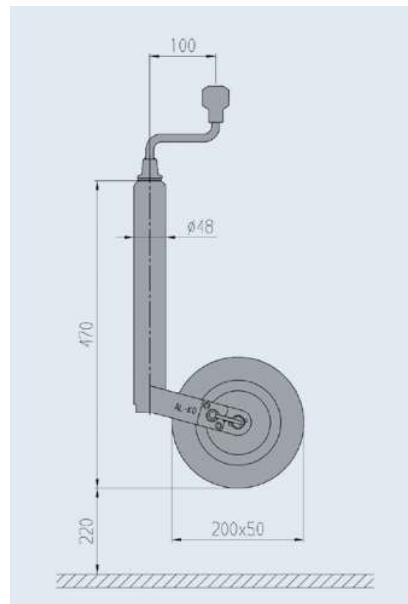

SAP: STÜTZRAD48COM AR150KG 200X50KS-FELG

Jockey wheel with PINSTOP

Part no.	1 224 351
Stationary nose load	Max. 150 kg
Nose load when manoeuvring	Max. 90 kg
Rim	Plastic
Wheel	200 x 50 solid rubber
Extended length	220 mm
	4.8 kg
	– 50 units

PLUS JOCKEY WHEELS

Ø 48 mm, max. 150 kg



YOUR ADVANTAGE


I High-quality corrosion protection

Hot-dip galvanisation with high coat thickness up to 70 µm. Abrasion of the zinc coat during height adjustment with the clamp is therefore not critical. The structure of the zinc coating is flowery.

I Extended version

I Crank moves smoothly

The built-in thrust bearing under the crank facilitates operation.

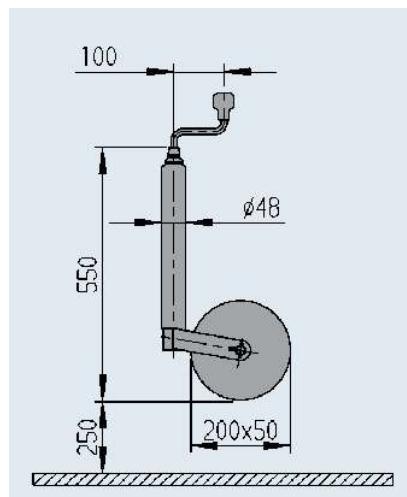


SAP: STÜTZRAD48PLUS 150KG 200X50ST-FELGE

PLUS jockey wheel

Part no.	1 222 436
Stationary nose load	Max. 150 kg
Nose load when manoeuvring	Max. 90 kg
Rim	steel
Wheel	200 x 50 solid rubber
Extended length	250 mm
	5.0 kg
	— 125 units

9

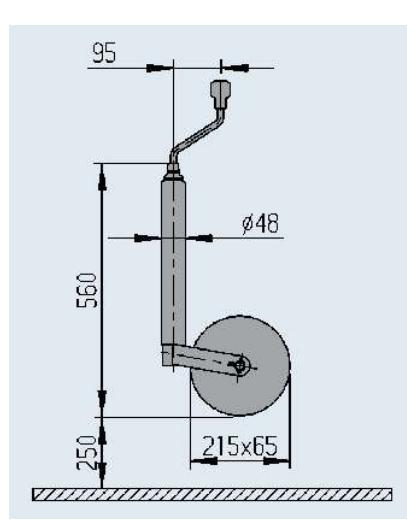

SAP: STÜTZRAD48PLUS 150KG 215X65SOFT-RAD

PLUS jockey wheel

Part no.	1 222 435
Stationary nose load	Max. 150 kg
Nose load when manoeuvring	Max. 90 kg
Rim	Plastic
Wheel	215 x 65 soft rubber
Extended length	250 mm
	5.0 kg
	— 75 units

PLUS JOCKEY WHEELS

Ø 48 mm, max. 200 to 300 kg



YOUR ADVANTAGE


I High-quality corrosion protection

Hot-dip galvanisation with high coat thickness up to 70 µm. Abrasion of the zinc coat during height adjustment with the clamp is therefore not critical. The structure of the zinc coating is flowery.

I Extended version

I Crank moves smoothly


The built-in thrust bearing under the crank facilitates operation.

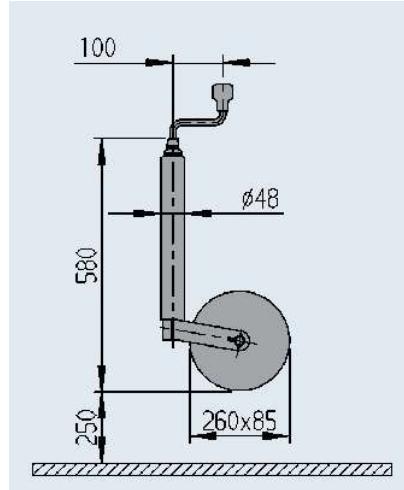

SAP: STÜZRAD48PLUS 200KG 260X85LUFT-RAD

PLUS jockey wheel

Part no.	1 222 438
Stationary nose load	Max. 200 kg
Nose load when manoeuvring	Max. 120 kg
Rim	steel
Wheel	260x85, air
Extended length	250 mm
	5.0 kg
	– 70 units

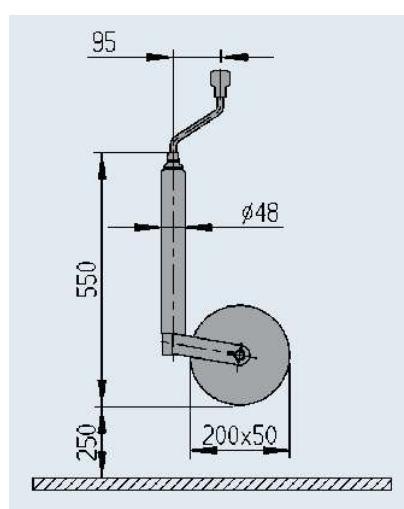

SAP: STÜZRAD48PLUS 300KG 200X50ST-FELGE

PLUS jockey wheel

Part no.	1 222 437
Stationary nose load	Max. 300 kg
Nose load when manoeuvring	Max. 180 kg
Rim	steel
Wheel	200x50 solid rubber
Extended length	250 mm
	7.0 kg
	– 70 units

JOCKEY WHEEL WITH ANTI-SLIP DEVICE

Ø 48 mm, max. 300 kg





YOUR ADVANTAGE

I Prevents the crank from shaking loose

During towing, vibrations can move the crank. Consequently, it is possible that the inside tube with wheel could move downwards out of the outside tube. A wire bracket welded onto the outside tube can be hooked onto the crank in this jockey wheel, thereby preventing this **extreme case**.

I Prevents slipping

The outside tube of the jockey wheel has fluted indentations. The top part of the clamp of the new AE cast-iron Profi or the corresponding cast clamp have corresponding grooves. If the T-bar of the clamp is only tightened slightly, the jockey wheel cannot slip through; we refer to this as an **anti-slip device**. If the T-bar is not tightened at all, this anti-slip device will not function either.

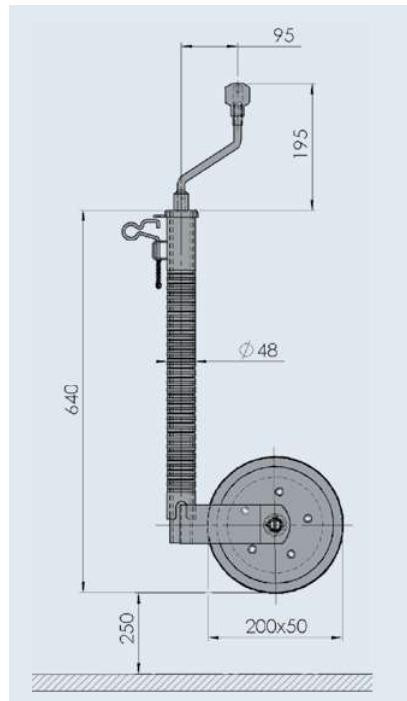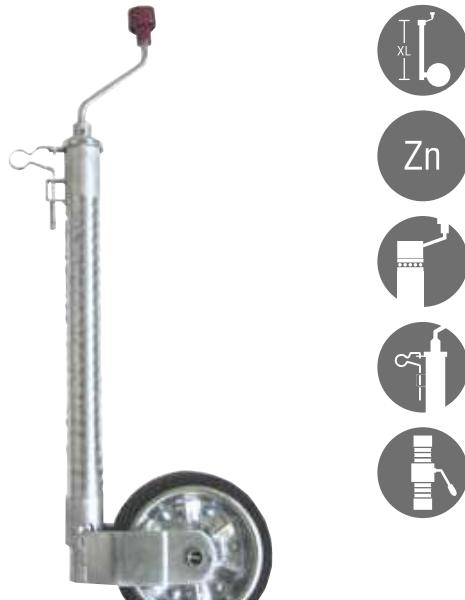


SAP: STÜTZRAD48RILLE300KG 200X50ST-FELGE

**Jockey wheel Ø 48, 300 kg
with anti-slip device**

Part no.	1 223 614
Stationary nose load	Max. 300 kg
Nose load when manoeuvring	Max. 180 kg
Rim	steel
Wheel	200 x 50 solid rubber
Extended length	250 mm
<input checked="" type="checkbox"/> 8.0 kg	8.0 kg
<input type="checkbox"/> – 70 units	– 70 units

9

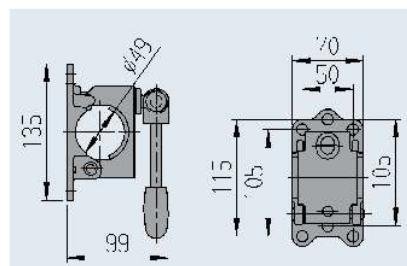

SAP: KLEMMSCHELLE M RILLE KPL GUSS 48 VZ

Clamp Ø 48 folding T-bar

Part no.	249 804
Stationary nose load	Max. 300 kg
<input checked="" type="checkbox"/> 1.0 kg	1.0 kg
<input type="checkbox"/> – 155 units	– 155 units

Can also be used for jockey wheel with anti-slip device (part no. 1 223 614)

PREMIUM JOCKEY WHEEL

Ø 48 mm, max. 300 kg



YOUR ADVANTAGE

1 Extremely stable design

(Stationary nose load max. 300 kg)

2 With integrated swing arm suspension

Unevenness in the ground (e.g. kerb stones) is cushioned by the suspension

3 With integrated wheel load indicator

No separate balance necessary

4 Wide, crowned wheel 230x80 mm with a modern design, easy to manoeuvre

I Small contact area on hard ground
I Large contact area on soft ground

5 Crank easy to turn


The built-in thrust bearing under the crank facilitates operation.

6 Crank with ergonomic shape, removable

7 Wheel is removable

8 High-quality corrosion protection

Hot-dip galvanisation with large coat thickness up to 70 µm. Abrasion of the zinc coat during height adjustment with the clamp is thus not critical. The structure of the zinc coat is uneven (flowery)

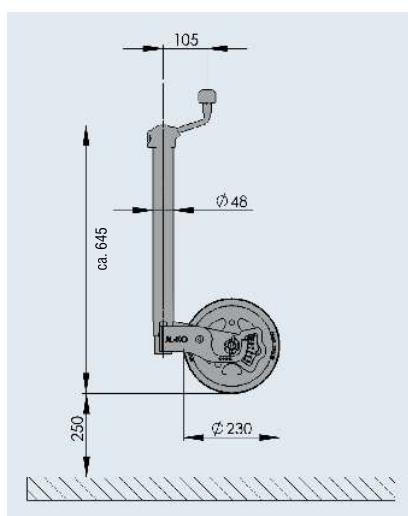


SAP: STÜTZRAD48PREM 300KG 230X80 LASTANZ

Premium jockey wheel

Part no.	1 221 695
Stationary nose load	Max. 300 kg
Nose load when manoeuvring	Max. 180 kg
Rim	steel
Wheel	230 x 80 solid rubber
Extended length	250 mm
	9.8 kg
	– 40 units

JOCKEY WHEEL

Ø 60 mm, max. 500 kg

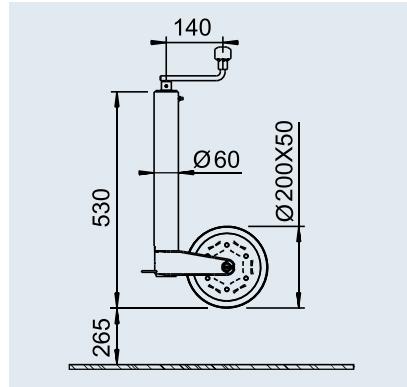


SAP: STUETZRAD SPNDL 500

Jockey wheel, support shoe rigid

Part no.	243 888
Stationary nose load	Max. 500 kg
Nose load when manoeuvring	Max. 300 kg
Rim	steel
Wheel	200 x 50 solid rubber
Extended length	265 mm
	8.0 kg
	– 75 units

JOCKEY WHEELS



Ø 60 mm, max. 500 kg

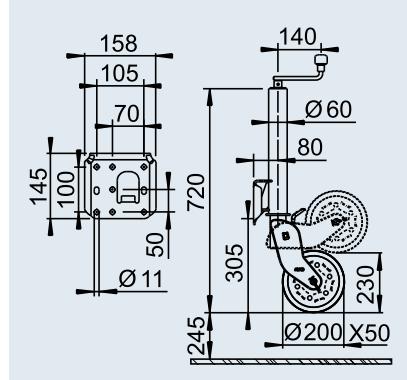

SAP: STUETZRAD SPNDL AUTOM 500 VERZINKT

Jockey wheel, support shoe semi-automatic

Part no.	242 061
Stationary nose load	Max. 500 kg
Nose load when manoeuvring	Max. 300 kg
Rim	steel
Wheel	200 x 50 solid rubber
Extended length	245 mm
	10.0 kg
	– 60 units

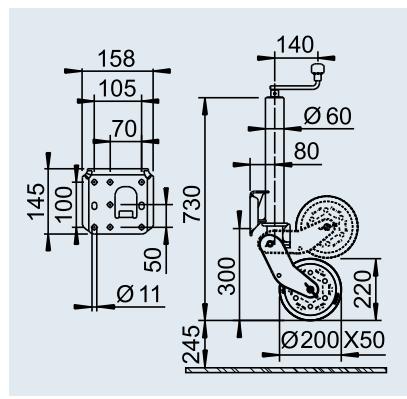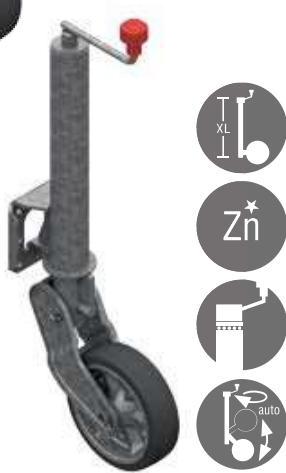


SAP: STÜTZRAD SPNDL AUTOM 500KG FEUVZ830

Jockey wheel, support shoe fully automatic

Part no.	1 212 382
Stationary nose load	Max. 500 kg
Nose load when manoeuvring	Max. 300 kg
Rim	steel
Wheel	200 x 50 solid rubber
Extended length	245 mm
	9.8 kg
	– 50 units

JOCKEY WHEELS

Ø 60 mm, max. 500 kg


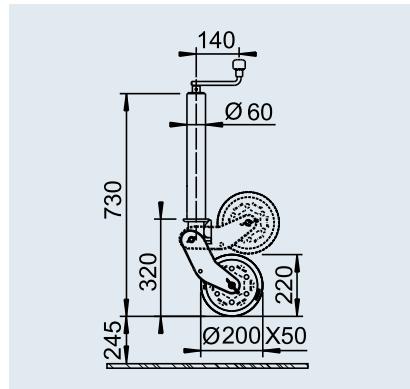


SAP: STÜZRAD SPNDL AUTOM 500KG FEUVZ830
Jockey wheel, support shoe fully automatic, without flange

Part no.	1 654 777
Stationary nose load	Max. 500 kg
Nose load when manoeuvring	Max. 300 kg
Rim	steel
Wheel	200 x 50 solid rubber
Extended length	245 mm
	9.3 kg
	– 50 units


YOUR ADVANTAGE

- || Long version for greater adjustment stroke
- || Jockey wheel flange welded on low so there is greater swivel room for the support shoe when moving up
- || Wide and crowned wheel 230 x 80 mm with very good manoeuvring properties and a modern design, small contact surface on hard ground, large contact surface on soft ground
- || With grease nipple

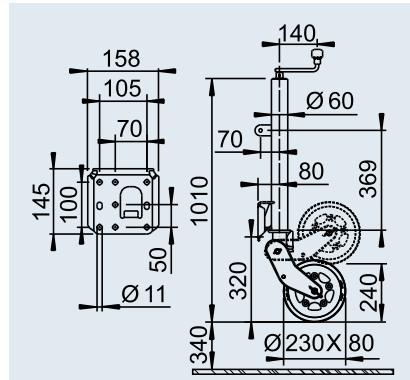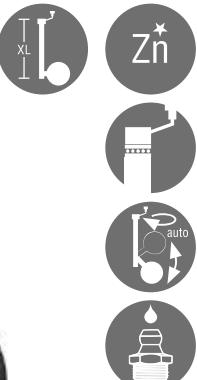

SAP: STÜZRAD SPNDL AUTOM 500KG FEUVZ
Jockey wheel, fully automatic with flange, extended

Part no.	1 223 638
Stationary nose load	Max. 500 kg
Nose load when manoeuvring	Max. 300 kg
Rim	steel
Wheel	230 x 80 solid rubber
Extended length	340 mm
	12.0 kg
	– 30 units

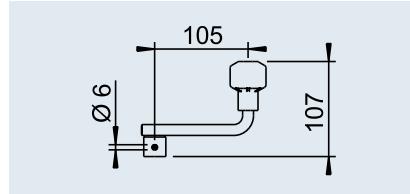

SAP: KURBEL KPL 105 LANG

Loose crank	
Part no.	693 555
Length	105 mm
	0.3 kg

JOCKEY WHEELS

Ø 73 mm, max. 800 kg
for truck and agricultural trailers



YOUR ADVANTAGE

| **Stable design** thanks to thick-walled steel tubes, rolled spindles, ball thrust bearings, wheels on plastic bearings.

MOUNTING


| **Semi-automatic jockey wheel function**
(semi-automatic jockey wheels are not subject to accident prevention regulations). When raising by turning, the inside tube with support shoe and wheel are guided into the outside tube by a spindle according to the adjustment stroke. The wheel with support shoe must now be hooked in by the operator.

PRACTICAL TIP

Only the static load capacities are usually quoted on the market.
Please remember that the load capacity will be reduced by up to 40% during manoeuvring (dynamic load).

Use spacer for jockey wheel carrier!

- | More space between jockey wheel and drawbar section
- | The jockey wheel can be attached 50 mm higher (increased ground clearance)

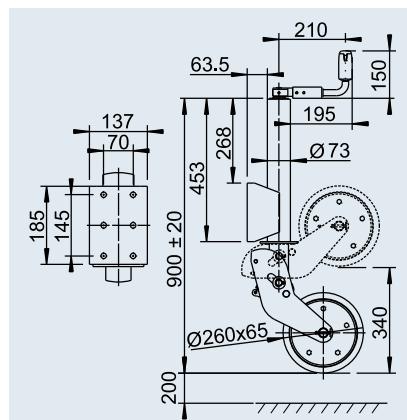

SAP: STÜTZRAD SPNDL AUTOM 800


Jockey wheel, support shoe fully automatic

Part no.	1 366 155
Stationary nose load	Max. 800 kg
Nose load when manoeuvring	Max. 480 kg
Rim	steel
Wheel	260 x 65 solid rubber
Extended length	200 mm
	21.2 kg
	– 30 units

9

JOCKEY WHEELS



Ø 70 mm, max. 1,200 to 1,500 kg
for truck and agricultural trailers

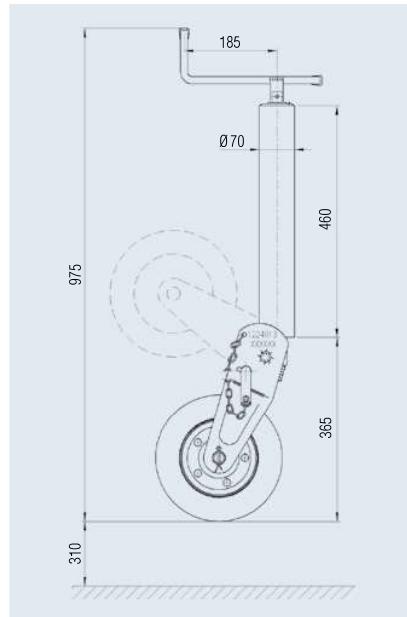

SAP: STUETZRAD SPNDL AUTOM 1200

Jockey wheel, support shoe semi-automatic

Part no.	1 224 013
Stationary nose load	Max. 1,200 kg
Nose load when manoeuvring	Max. 720 kg
Surface treatment	primed
Rim	steel
Wheel	250 x 80 solid rubber
Extended length	310 mm
	17.7 kg
	– 25 units

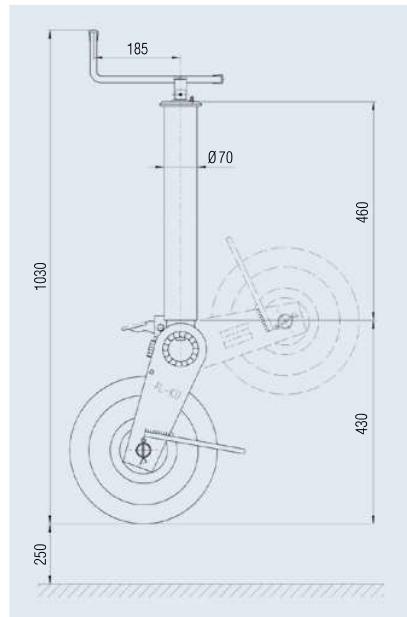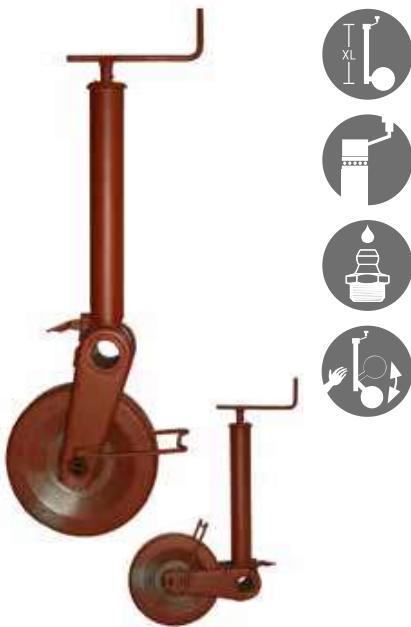


SAP: STUETZRAD SPNDL AUTOM 1500

Jockey wheel, support shoe semi-automatic

Part no.	1 224 012
Stationary nose load	Max. 1,500 kg
Nose load when manoeuvring	Max. 900 kg
Surface treatment	primed
Rim	steel
Wheel	310x90, steel
Extended length	250 mm
	25.0 kg
	– 20 units

ACCESSORIES FOR JOCKEY WHEELS


Clamps, Ø 48 to 60 mm

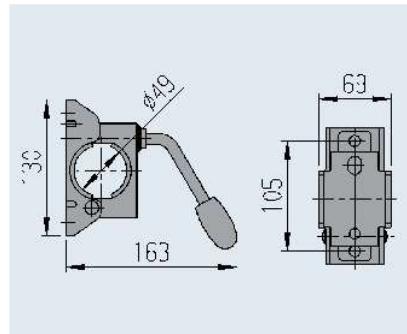

SAP: KLEMMSCHELLE F ROHR 48 VZ MONT WH

Clamp Ø 48, rigid T-bar

Part no. (mounted)	205 318 10
Part no. (loose)	205 318
Stationary nose load	Max. 200 kg
	0.8 kg
	– 300 units


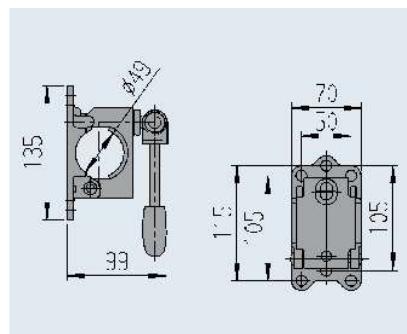


SAP: KLEMMSCHELLE M RILLE KPL GUSS 48 VZ

Clamp Ø 48, folding T-bar

Part no.	249 804
Stationary nose load	Max. 300 kg
	1.0 kg
	– 125 units



9

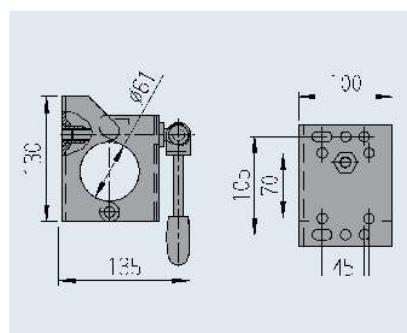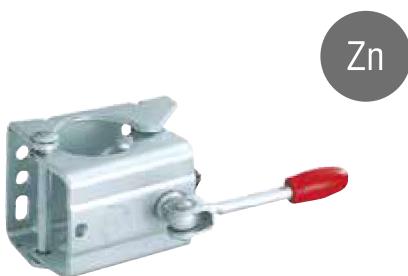

SAP: KLEMMSCHELLE KPL 60

Clamp Ø 60, folding T-bar

Part no.	249 859
Stationary nose load	Max. 500 kg
	2.0 kg
	– 125 units

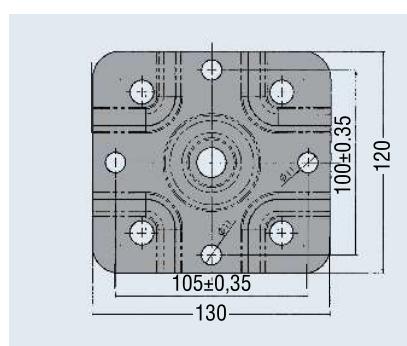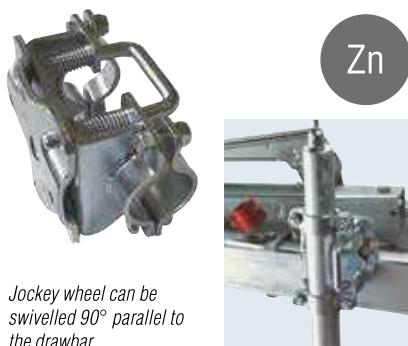

SAP: SCHWENKKOPF KPL MONT

Clamp Ø 48, pivoting

Part no.	1 335 092
Stationary nose load	Max. 300 kg
	2.42 kg
	– 50 units

ACCESSORIES FOR JOCKEY WHEELS

Manoeuvring handle, Ø 48 mm

YOUR ADVANTAGE


I Manoeuvring aid

The sturdy handle provides ideal assistance when manoeuvring caravans and truck trailers of all kinds. Can be retrofitted on jockey wheels with Ø 48 mm outside tube.



I Protection

The manoeuvring handle also prevents loss of the jockey wheel when towing if a locking bar has not been tightened properly.

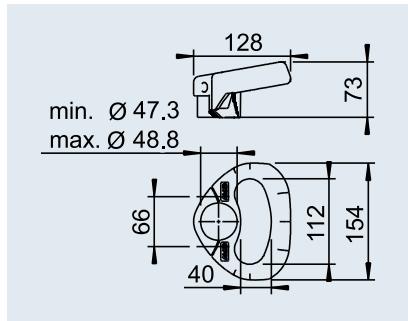

SCOPE OF SUPPLY

Manoeuvring handle including fastening material and mounting instructions, packaged



SAP: RANGIERGRIFF STÜTZRAD48 VE-1 STÜCK

Manoeuvring handle for jockey wheels Ø 48


Part no. (individual)	1 210 182
Part no. (PU)	1 210 867
Surface treatment	Plastic, red RAL 3000
	0.2 kg
	– 20 units

ACCESSORIES FOR JOCKEY WHEELS

Spacer / jockey wheel flange



Zn*

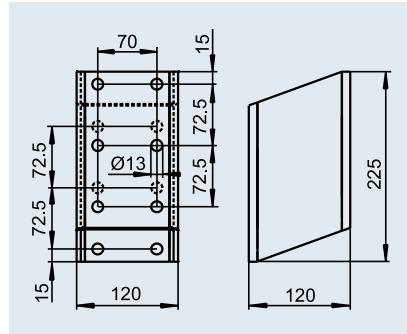


SAP: DISTANZ STÜTZRADHALTER

Spacer for jockey wheel carrier

Part no.	1 362 106
	3.0 kg
	1 unit -



Zn*

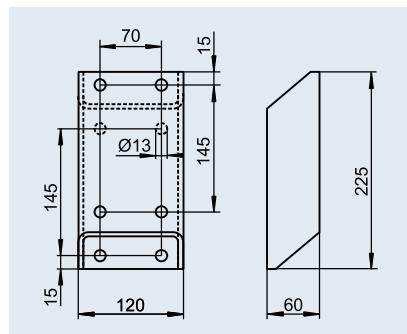

SAP: DISTANZ STÜTZRADHALTER FEUVZ


Spacer for jockey wheel carrier

Part no.	1 336 503
	2.0 kg
	1 unit -

9



Zn

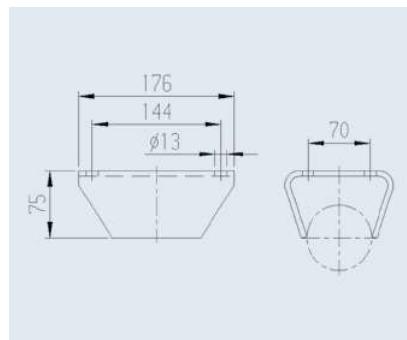

SAP: FLANSCH STUETZRAD 70 D

Jockey wheel flange Ø 70


Part no.	1 224 014
Stationary nose load	Max. 1,500 kg
Nose load when manoeuvring	Max. 900 kg
	1.7 kg
	- 100 units

JOCKEY WHEEL ST 35 / ST 48

Ø 35 – 48 mm, max. 75 – 150 kg




Zn

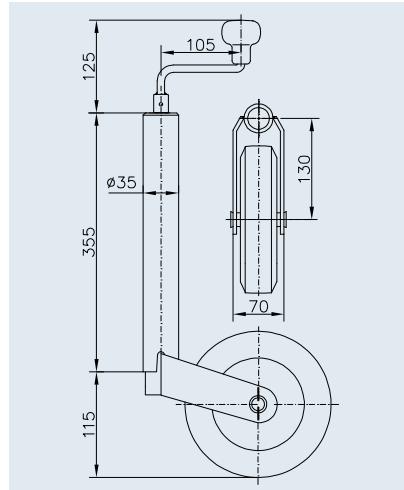**SAP:** STÜZRAD ST 35-160 V**Jockey wheel ST 35-160 V**

Part no.	275620 (W 6010)
Stationary nose load	Max. 75 kg
Nose load when manoeuvring	Max. 45 kg
Rim	Plastic
Wheel	160 x 40 solid rubber
Extended length	220 mm
	2.56 kg
	EWP 150 / GiBo 170
	12




Zn

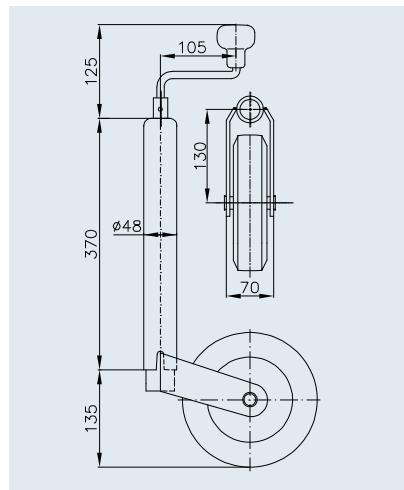**SAP:** STÜZRAD ST 48-200 V**Jockey wheel ST 48-200 V**

Part no.	1860904 (W 6030)
Stationary nose load	Max. 150 kg
Nose load when manoeuvring	Max. 90 kg
Rim	Plastic
Wheel	200 x 50 solid rubber
Extended length	220 mm
	4.43 kg
	EWP 125 / GiBo 125
	12




Zn

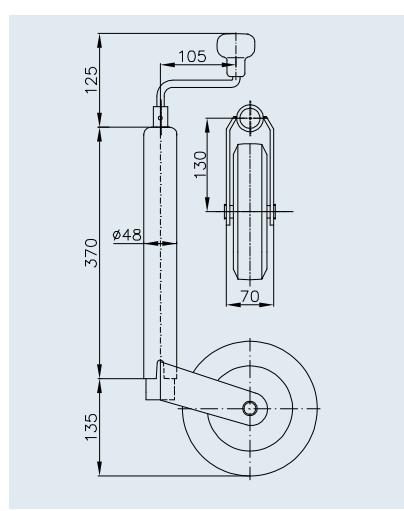**SAP:** STÜZRAD ST 48-200 VB**Jockey wheel ST 48-200 VB**


Part no.	1860905 (W 6032)
Stationary nose load	Max. 150 kg
Nose load when manoeuvring	Max. 90 kg
Rim	steel
Wheel	200 x 50 solid rubber
Extended length	220 mm
	4.65 kg
	EWP 125 / GiBo 125
	12

JOCKEY WHEEL ST 48


Ø 48 mm, max. 150 kg

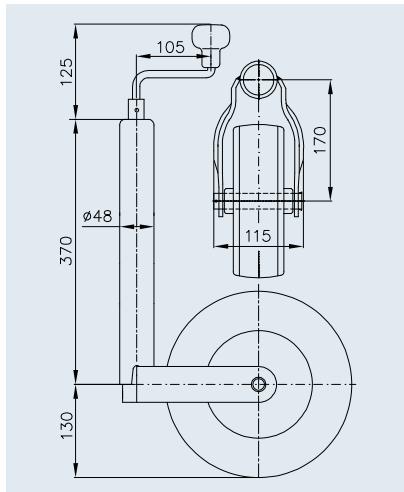**SAP:** STÜZRAD ST 48-260 L**Jockey wheel ST 48-260 L**

Part no.	1860908 (W 6050)
Stationary nose load	Max. 150 kg
Nose load when manoeuvring	Max. 90 kg
Rim	Plastic
Wheel	260x85, air
Extended length	210 mm
	4.80 kg
	EWP 60 / GiBo 60
	12

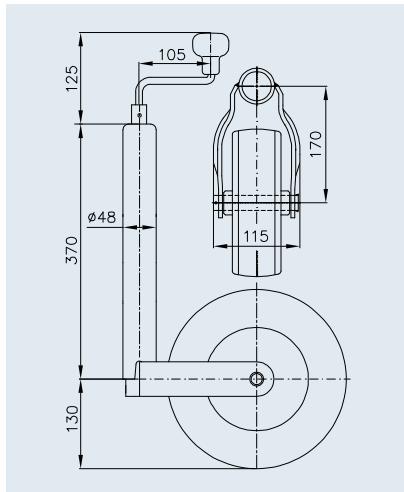**SAP:** STÜZRAD ST 48-260 LB**Jockey wheel ST 48-260 LB**


Part no.	1860909 (W 6052)
Stationary nose load	Max. 150 kg
Nose load when manoeuvring	Max. 90 kg
Rim	steel
Wheel	260x85, air
Extended length	210 mm
	5.10 kg
	EWP 60 / GiBo 60
	12

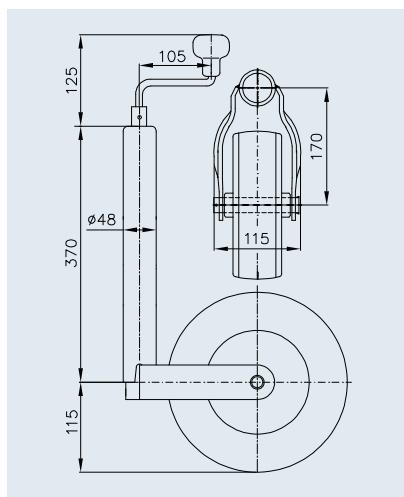**SAP:** STÜZRAD ST 48-255 S**Jockey wheel ST 48-255 S**


Part no.	1860917 (W 6070)
Stationary nose load	Max. 150 kg
Nose load when manoeuvring	Max. 90 kg
Rim	Plastic
Wheel	225 x 70 solid rubber
Extended length	210 mm
	5.54 kg
	EWP 75 / GiBo 75
	12

JOCKEY WHEEL ST 48


Ø 48 mm, max. 150 kg

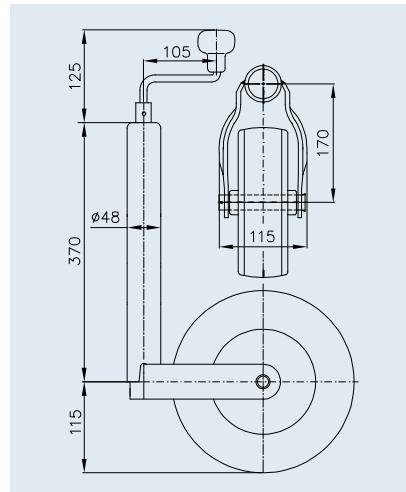**SAP:** STÜZRAD ST 48-255 SB**Jockey wheel ST 48-255 SB**

Part no.	1860919 (W 6072)
Stationary nose load	Max. 150 kg
Nose load when manoeuvring	Max. 90 kg
Rim	steel
Wheel	225 x 70 solid rubber
Extended length	210 mm
	5,83 kg
	EWP 75 / GiBo 75
	12

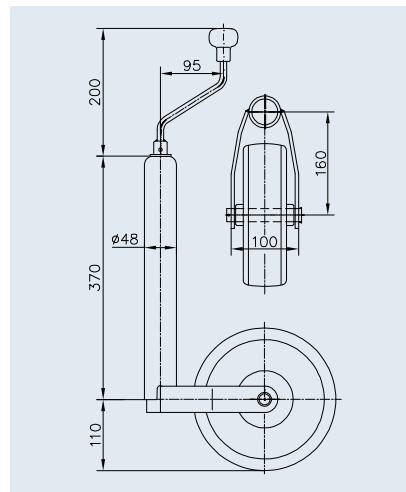**SAP:** STÜZRAD ST 48-C-240 S**Jockey wheel ST 48-C-240 S**


Part no.	1860912 (W 6065)
Stationary nose load	Max. 150 kg
Nose load when manoeuvring	Max. 90 kg
Rim	Plastic
Wheel	215 x 70, rubber
Extended length	220 mm
	4,51 kg
	EWP 75 / GiBo 75
	12

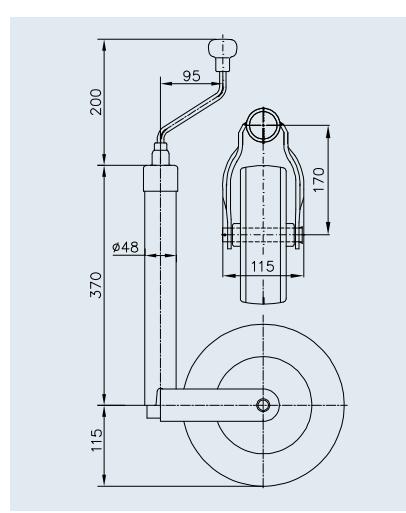**SAP:** STÜZRAD ST 48-CE-255 SB**Jockey wheel ST 48-CE-255 SB**


Part no.	1860911 (W 6063)
Stationary nose load	Max. 150 kg
Nose load when manoeuvring	Max. 90 kg
Rim	steel
Wheel	225 x 70 solid rubber
Extended length	220 mm
	5,91 kg
	EWP 70 / GiBo 75
	12

JOCKEY WHEEL ST 48


reinforced version, Ø 48 mm, max. 200 – 250 kg

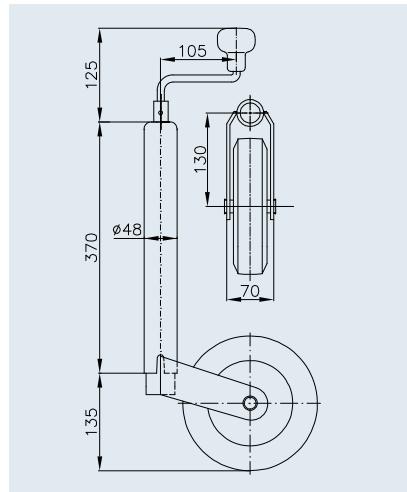
SAP: STÜZRAD ST 48-V-200 VB
Jockey wheel ST 48-V-200 VB

Part no.	1860926 (W 6122)
Stationary nose load	Max. 200 kg
Nose load when manoeuvring	Max. 120 kg
Rim	steel
Wheel	200 x 50 solid rubber
Extended length	230 mm
	5.06 kg
	EWP 125 / GiBo 125
	12

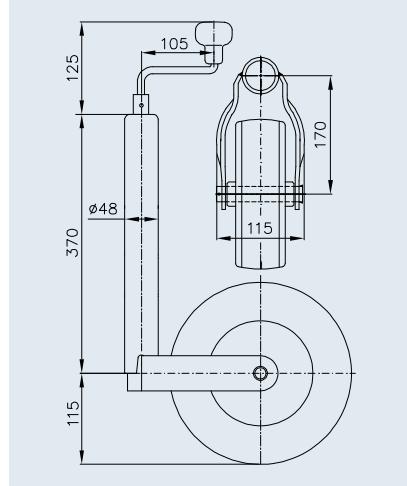
SAP: STÜZRAD ST 48-V-255 SB
Jockey wheel ST 48-V-255 SB


Part no.	1860927 (W 6124)
Stationary nose load	Max. 200 kg
Nose load when manoeuvring	Max. 120 kg
Rim	steel
Wheel	225 x 70 solid rubber
Extended length	230 mm
	6.28 kg
	EWP 75 / GiBo 75
	12

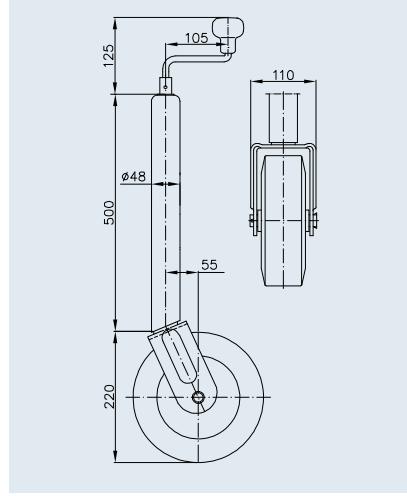
SAP: STÜZRAD ST 48-VLS-255 SB
Jockey wheel ST 48-VLS-255 SB

Part no.	1860871 (W 3432)
Stationary nose load	Max. 250 kg
Nose load when manoeuvring	Max. 150 kg
Rim	steel
Wheel	225 x 70 solid rubber
Extended length	230 mm
	7.60 kg
	EWP 70 / GiBo 70
	12

JOCKEY WHEEL ST 48


with integrated nose load indicator, Ø 48 mm, max. 150 kg

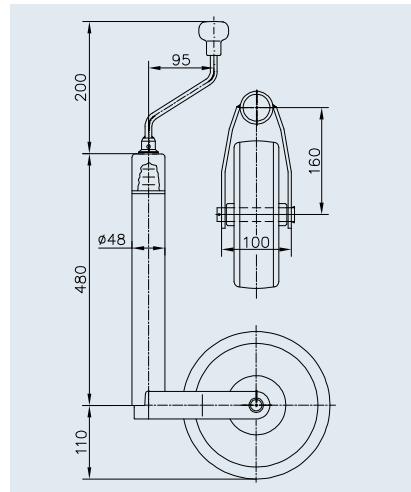

SAP: STÜZRAD ST 48-CW-240 S+BA

Jockey wheel ST 48-CW-240 S


Part no.	1860923 (W 6085)
Stationary nose load	Max. 150 kg
Nose load when manoeuvring	Max. 90 kg
Rim	Plastic
Wheel	215x70, rubber
Extended length	220 mm
	5,30 kg
	EWP 75 / GiBo 75
	12

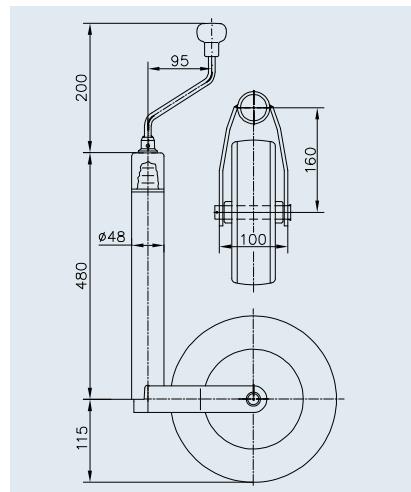

SAP: STÜZRAD ST 48-CW-255 SB+BA

Jockey wheel ST 48-CW-255 SB

Part no.	1860924 (W 6095)
Stationary nose load	Max. 150 kg
Nose load when manoeuvring	Max. 90 kg
Rim	steel
Wheel	225 x 70 solid rubber
Extended length	220 mm
	6,62 kg
	EWP 75 / GiBo 75
	12

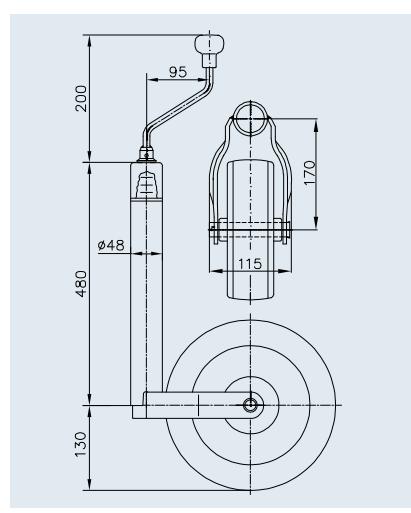


SAP: STÜZRAD ST 48-CW-260 LB+BA

Jockey wheel ST 48-CW-260 LB

Part no.	1860925 (W 6097)
Stationary nose load	Max. 150 kg
Nose load when manoeuvring	Max. 90 kg
Rim	steel
Wheel	260 x 85, air
Extended length	220 mm
	5,57 kg
	EWP 60 / GiBo 60
	12

JOCKEY WHEEL ST 48

with integrated brake function, Ø 48 mm, max. 150 kg

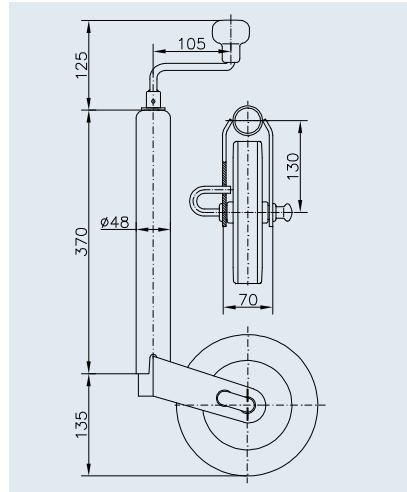

SAP: STÜTZRAD ST 48-RB-200 V

Jockey wheel ST 48-RB-200 V


Part no.	1860910 (W 6059)
Stationary nose load	Max. 150 kg
Nose load when manoeuvring	Max. 90 kg
Rim	Plastic
Wheel	200 x 50 solid rubber
Extended length	220 mm
	4.60 kg
	EWP 100 / GiBo 100
	12

JOCKEY WHEEL ST 60

Ø 60 mm, max. 250 kg



9

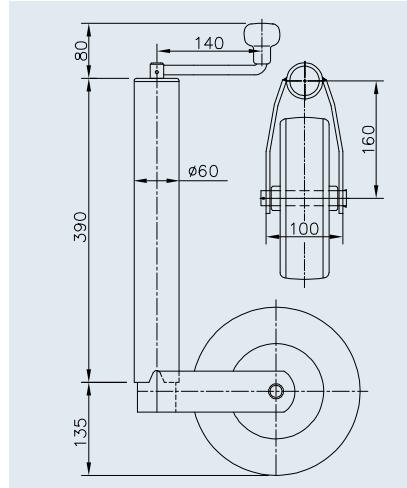


SAP: STÜTZRAD ST 60-255 SB

Jockey wheel ST 60-255 SB


Part no.	1860678 (W 4062)
Stationary nose load	Max. 250 kg
Nose load when manoeuvring	Max. 150 kg
Rim	steel
Wheel	225 x 70 solid rubber
Extended length	230 mm
	7.75 kg
	EWP 75 / GiBo 75
	12

JOCKEY WHEEL ST 60

reinforced version, Ø 60 mm, max. 400 – 500 kg

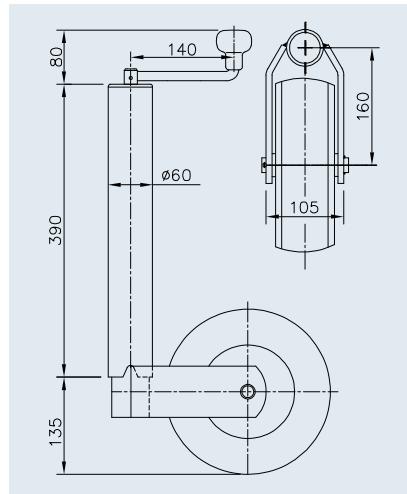
SAP: STÜZRAD ST 60-V-255 SB


Jockey wheel ST 60-V-255 SB	
Part no.	1860889 (W 4066)
Stationary nose load	Max. 400 kg
Nose load when manoeuvring	Max. 240 kg
Rim	steel
Wheel	225 x 70 solid rubber
Extended length	230 mm
	9,23 kg
	EWP 70 / GiBo 70
	12

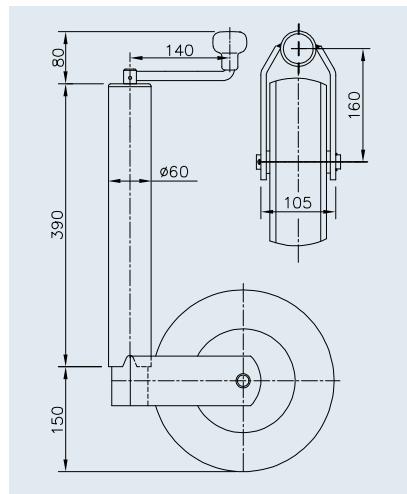
SAP: STÜZRAD ST 60-V-255 VB


Jockey wheel ST 60-V-255 VB	
Part no.	1860891 (W 4068)
Stationary nose load	Max. 500 kg
Nose load when manoeuvring	Max. 300 kg
Rim	steel
Wheel	225 x 80 solid rubber
Extended length	230 mm
	10,65 kg
	EWP 60 / GiBo 60
	12

JOCKEY WHEEL K 60

with semi-automatic support shoe, Ø 60 mm, max. 250 kg

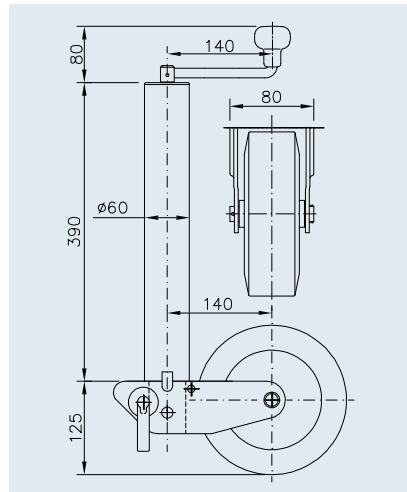
SAP: STÜTZRAD K 60-200 VB

Part no.	1860879 (W 4020)
Stationary nose load	Max. 250 kg
Nose load when manoeuvring	Max. 150 kg
Rim	steel
Wheel	200 x 50 solid rubber
Extended length	180 + 230 mm
	7.99 kg
	EWP 70 / GiBo 70
	12

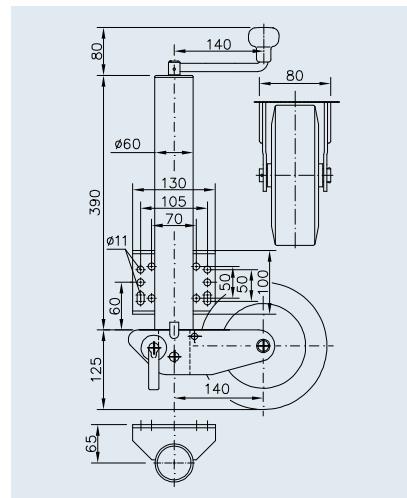
SAP: STÜTZRAD K 60-B-200 VB


Part no.	1860880 (W 4040)
Stationary nose load	Max. 250 kg
Nose load when manoeuvring	Max. 150 kg
Rim	steel
Wheel	200 x 50 solid rubber
Extended length	180 + 230 mm
	8.80 kg
	EWP 70 / GiBo 70
	12

JOCKEY WHEEL VK 60 SQUARE

with fully automatic support shoe, Ø 60 mm, max. 250 kg



- Zn
- ⁺
- ^{auto}
- XL
- ⁺

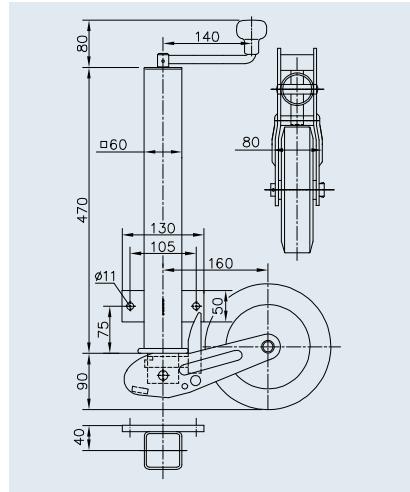


SAP: STÜZRAD VK 60-P2H-200 VBB

Jockey wheel VK 60-P2H-200 VBB

Part no.	1860667 (W 6404)
Stationary nose load	Max. 250 kg
Nose load when manoeuvring	Max. 150 kg
Rim	steel
Wheel	200 x 60 solid rubber
Extended length	235 + 235 mm
	10,43 kg
	EWP 70 / GiBo 70
	12



- Zn
- ⁺
- ^{auto}
- XL
- ⁺

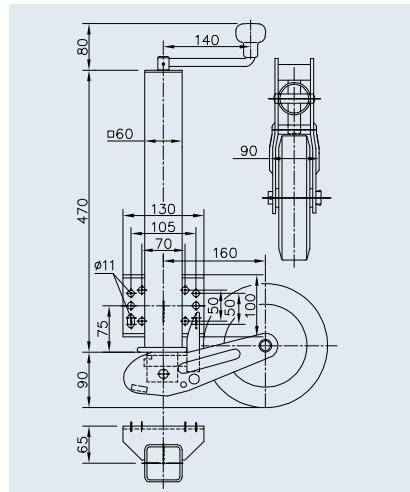


SAP: STÜZRAD VK 60-PB1-200 VBB

Jockey wheel VK 60-PB1-200 VBB

Part no.	1860877 (W 3861)
Stationary nose load	Max. 250 kg
Nose load when manoeuvring	Max. 150 kg
Rim	steel
Wheel	200 x 60 solid rubber
Extended length	235 + 235 mm
	10,52 kg
	EWP 70 / GiBo 70
	12

JOCKEY WHEEL VK 60


with fully automatic support shoe, Ø 60 mm, max. 250 kg

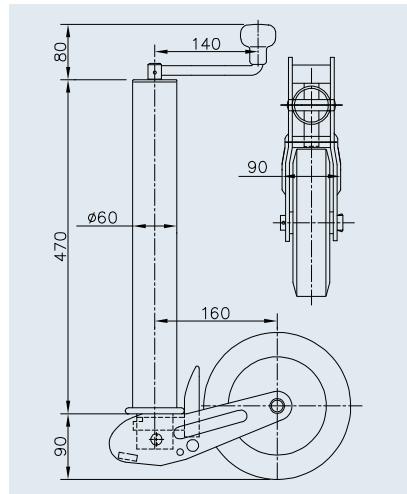

SAP: STÜZRAD VK 60-200 VBB

Jockey wheel VK 60-200 VBB


Part no.	1860872 (W 3820)
Stationary nose load	Max. 250 kg
Nose load when manoeuvring	Max. 150 kg
Rim	steel
Wheel	200 x 60 solid rubber
Extended length	235 + 235 mm
	9.44 kg
	EWP 70 / GiBo 70
	12

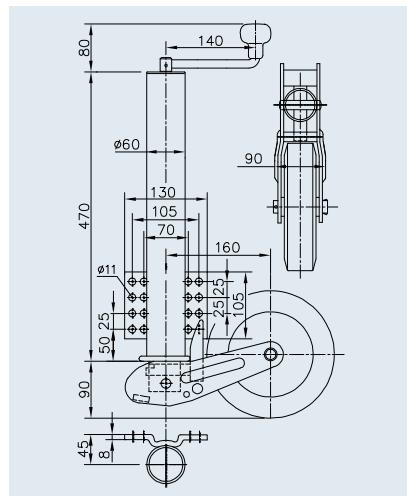

SAP: STÜZRAD VK 60-KH-200 VBB

Jockey wheel VK 60-KH-200 VBB

Part no.	1860664 (W 6400)
Stationary nose load	Max. 250 kg
Nose load when manoeuvring	Max. 150 kg
Rim	steel
Wheel	200 x 60 solid rubber
Extended length	235 + 235 mm
	10.09 kg
	EWP 70 / GiBo 70
	12

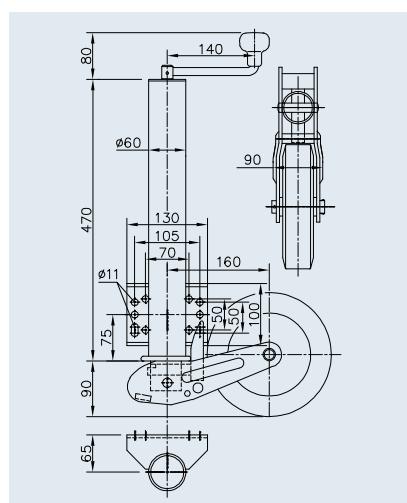


SAP: STÜZRAD VK 60-BH-200 VBB

Jockey wheel VK 60-BH-200 VBB

Part no.	1860670 (W 6410)
Stationary nose load	Max. 250 kg
Nose load when manoeuvring	Max. 150 kg
Rim	steel
Wheel	200 x 60 solid rubber
Extended length	235 + 235 mm
	10.24 kg
	EWP 70 / GiBo 70
	12

JOCKEY WHEEL VK 60

with fully automatic support shoe, Ø 60 mm, max. 350 kg

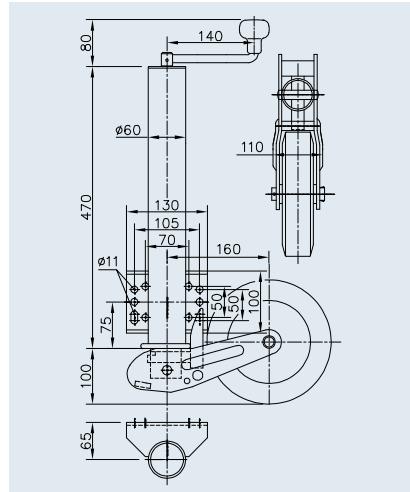


SAP: STÜZRAD VK 60-BH-255 SB

Jockey wheel VK 60-BH-255 SB

Part no.	1860671 (W 6412)
Stationary nose load	Max. 350 kg
Nose load when manoeuvring	Max. 210 kg
Rim	steel
Wheel	225 x 70 solid rubber
Extended length	235 + 235 mm
	10,81 kg
	EWP 60 / GiBo 60
	12


JOCKEY WHEEL VK 60 – LONG VERSION

with fully automatic support shoe, Ø 60 mm, max. 400 – 500 kg

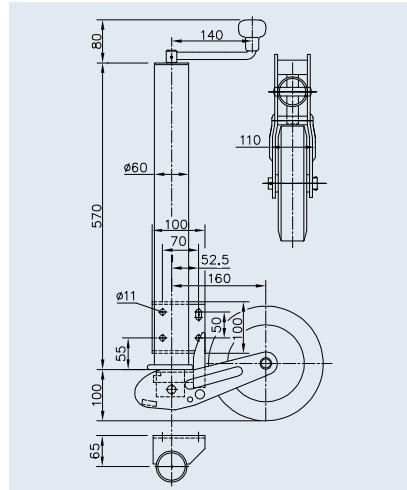

SAP: STÜTZRAD VK 60-ABLH-255 SB

Part no.	1860675 (W 6420)
Stationary nose load	Max. 400 kg
Nose load when manoeuvring	Max. 240 kg
Rim	steel
Wheel	225 x 70 solid rubber
Extended length	235 + 335 mm
	11.97 kg
	EWP 60 / GiBo 60
	12

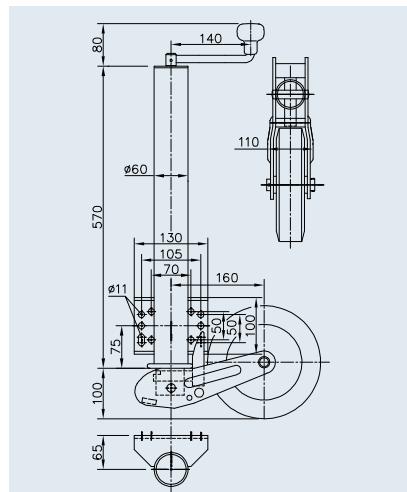


SAP: STÜTZRAD VK 60-BLH-255 SB

Part no.	1860674 (W 6415)
Stationary nose load	Max. 500 kg
Nose load when manoeuvring	Max. 300 kg
Rim	steel
Wheel	225 x 70 solid rubber
Extended length	235 + 335 mm
	11.99 kg
	EWP 55 / GiBo 60
	12

9

JOCKEY WHEEL K 70


with semi-automatic support shoe, Ø 70 mm, max. 500 – 600 kg

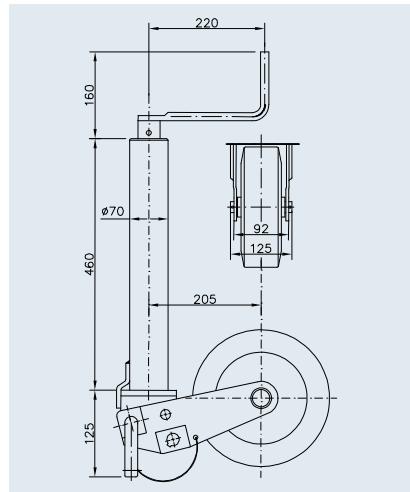

SAP: STÜZRAD K 70-250 VBR

Jockey wheel K 70-250 VBR

Part no.	1860882 (W 4050)
Stationary nose load	Max. 500 kg
Nose load when manoeuvring	Max. 300 kg
Rim	steel
Wheel	250 x 60 solid rubber
Extended length	245 + 220 mm
	16,06 kg
	EWP 25 / GiBo 25
	12

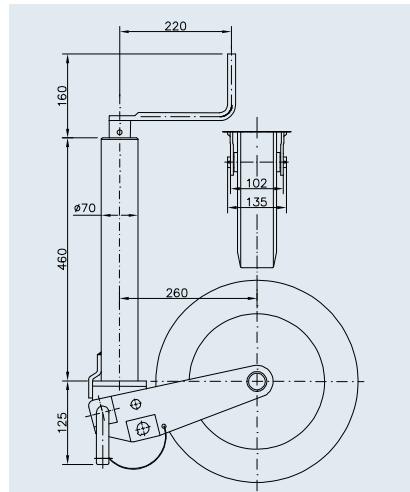


SAP: STÜZRAD K 70-400 VBR

Jockey wheel K 70-400 VBR

Part no.	1860886 (W 4058)
Stationary nose load	Max. 600 kg
Nose load when manoeuvring	Max. 360 kg
Rim	steel
Wheel	400 x 75 solid rubber
Extended length	330 + 220 mm
	19,00 kg
	EWP 20 / GiBo 20
	12

JOCKEY WHEEL ST 70

Ø 70 mm, max. 900 kg

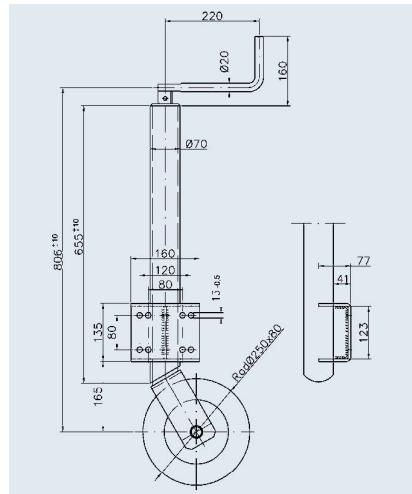

SAP: STÜTZRAD ST 70-L-250 VAR

Jockey wheel ST 70-L-250 VAR


Part no.	1860893 (<i>W 4072</i>)
Stationary nose load	Max. 900 kg
Nose load when manoeuvring	Max. 540 kg
Rim	steel
Wheel	250 x 80 solid rubber
Extended length	370 mm
	18,50 kg
 	EWP 25 / GiBo 25
	12

ACCESSORIES FOR JOCKEY WHEELS

Clamp bracket, Ø 35 mm, max. 75 kg



Zn

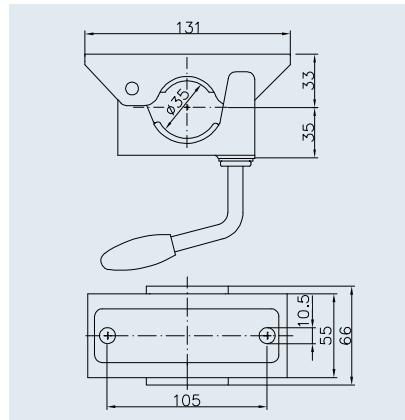
**SAP:** KLEMMSCHELLE KLE 35**Bracket KLE 35**

Part no.	1860640 (<i>W 1810</i>)
Stationary nose load	Max. 75 kg
Base plate	steel
Connection	2-hole
	0.76 kg
	EWP 1,000 / GiBo 1,000
	12

Clamp bracket, Ø 48 mm, max. 250 kg




Zn

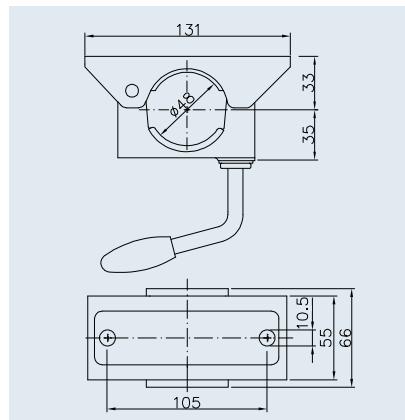**SAP:** KLEMMSCHELLE KLE 48**Bracket KLE 48**

Part no.	1860644 (<i>W 1819</i>)
Stationary nose load	Max. 250 kg
Base plate	steel
Connection	2-hole
	0.76 kg
	EWP 1,000 / GiBo 1,000
	12



Zn

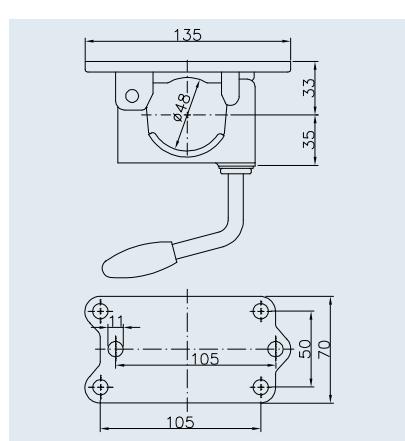**SAP:** KLEMMSCHELLE KLE 48-G**Bracket KLE 48-G**


Part no.	1860656 (<i>W 1844</i>)
Stationary nose load	Max. 250 kg
Base plate	cast-iron
Connection	6-hole
	0.82 kg
	EWP 1,000 / GiBo 1,000
	12

ACCESSORIES FOR JOCKEY WHEELS

Clamp bracket, Ø 48 mm, max. 250 kg




Zn

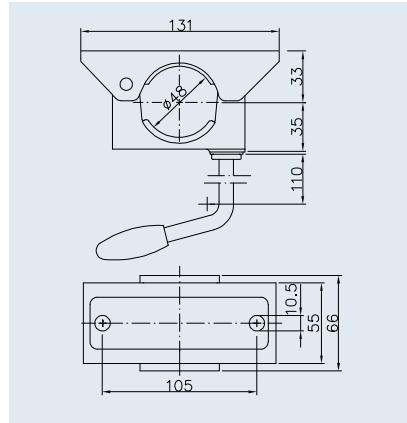**SAP:** KLEMMSCHELLE KLE 48-LK**Bracket KLE 48-LK**

Part no.	1860649 (W 1833)
Stationary nose load	Max. 250 kg
Base plate	steel
Connection	2-hole
	0.81 kg
	EWP 1,000 / GiBo 1,000
	12




Zn

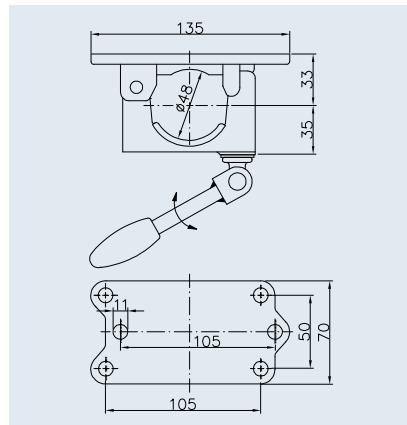**SAP:** KLEMMSCHELLE KLE 48-GKK**Bracket KLE 48-GKK**

Part no.	1860657 (W 1845)
Stationary nose load	Max. 250 kg
Base plate	cast-iron
Connection	6-hole
	0.90 kg
	EWP 750 / GiBo 750
	12



Zn

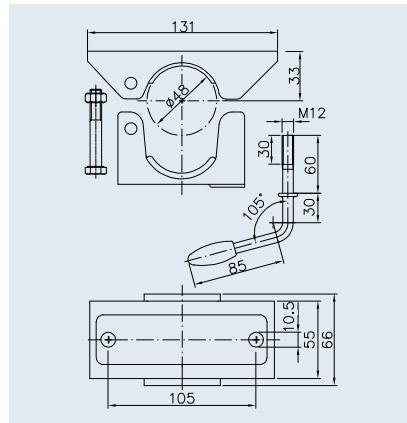**SAP:** KLEMMSCHELLE KLE 48-R**Bracket KLE 48-R**

Part no.	1860646 (W 1822)
Stationary nose load	Max. 250 kg
Base plate	Steel, crude
Connection	2-hole
	0.64 kg
	-
	12


ACCESSORIES FOR CLAMP BRACKETS

Ø 48 mm, max. 250 kg



KBF 60/70

Zn

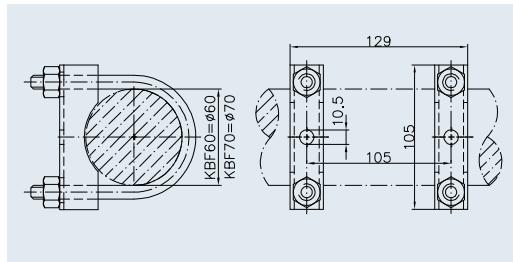**SAP: KLEMMHALTERBEFESTIGUNG KBF 60 RUND****Binder support KBF 60 ROUND**

Part no.	1860688 (<i>W 1910</i>)
-----------------	---------------------------

Stationary nose load	Max. 250 kg
-----------------------------	-------------

	0.71 kg
--	---------


	EWP 2,000 / GiBo 2,000
--	------------------------

	12
--	----



KBFV 60/70

Zn

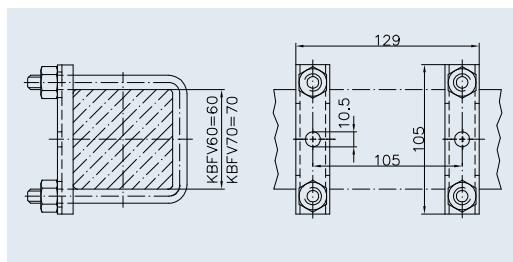**SAP: KLEMMHALTERBEFESTIGUNG KBFV 60 VIERK****Binder support KBFV 60**

Part no.	1860689 (<i>W 1911</i>)
-----------------	---------------------------

Stationary nose load	Max. 250 kg
-----------------------------	-------------

	0.55 kg
--	---------

	EWP 2,000 / GiBo 2,000
--	------------------------

	12
--	----

**SAP: KLEMMHALTERBEFESTIGUNG KBFV 70 VIERK****Binder support KBFV 70**

Part no.	1860691 (<i>W 1914</i>)
-----------------	---------------------------

Stationary nose load	Max. 250 kg
-----------------------------	-------------

	0.55 kg
--	---------

	EWP 2,000 / GiBo 2,000
--	------------------------

	12
--	----

Securing system

Blocking system BS-KLE 48
secures jockey wheel ST 48 while driving.

**SAP: VERLIESICHERUNG STÜTZRAD 48MM****Securing system BS-KLE 48**

Part no.	1860693 (<i>W 1950</i>)
-----------------	---------------------------

	0.13 kg
--	---------

	EWP 1,000 / GiBo 1,000
--	------------------------


	12
--	----

ACCESSORIES FOR JOCKEY WHEELS

Clamp bracket, Ø 60 mm, max. 500 kg




Zn

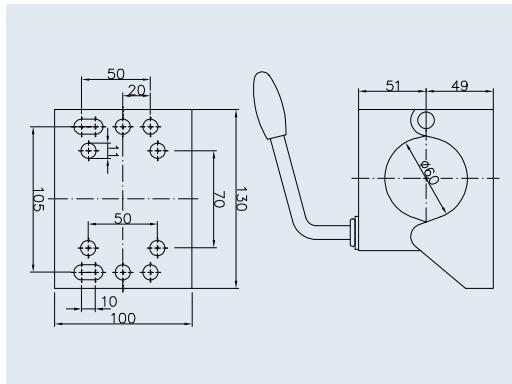**SAP:** KLEMMSCHELLE KLE 60**Bracket KLE 60**

Part no.	1861428 (<i>W 3640</i>)
Stationary nose load	Max. 500 kg
Base plate	steel
Connection	10-hole
	1.56 kg
	EWP 200 / GiBo 200
	12



Zn

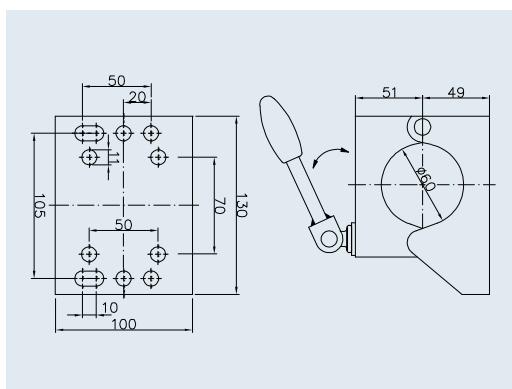**SAP:** KLEMMSCHELLE KLE 60-KK**Bracket KLE 60-KK**


Part no.	1861429 (<i>W 3643</i>)
Stationary nose load	Max. 500 kg
Base plate	steel
Connection	10-hole
	1.57 kg
	EWP 200 / GiBo 200
	12

9

Fastening for outside tube Ø 70 mm




Zn

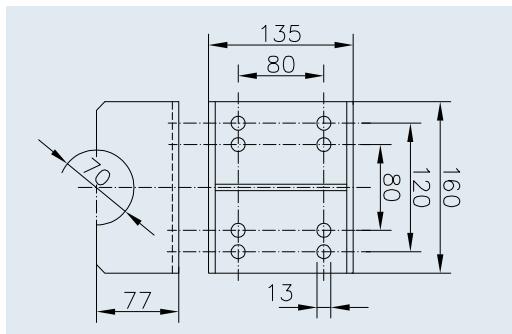**SAP:** KLE 70 STEG GESCHW ROH**Bracket KLE 70**

Part no.	1860694 (<i>W 3650</i>)
Base plate	steel
Connection	8-hole
	3.26 kg
	EWP 150 / GiBo 150
	12



Zn

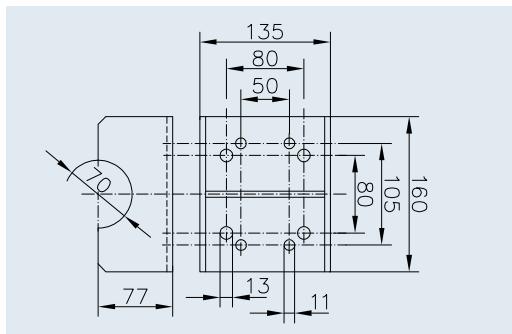**SAP:** Klemmhalter KLE 70-105x50**Bracket KLE 70-105x50**

Part no.	1861028 (<i>W 3655</i>)
Base plate	steel
Connection	8-hole
	3.26 kg
	EWP 150 / GiBo 150
	12

ACCESSORIES FOR JOCKEY WHEELS

Spare wheels

**SAP:** RAD 160 V**Wheel 160 V**

Part no.	1860592 (<i>W 5410</i>)
Wheel	160 x 40 mm, rubber
Rim	Plastic
Hub	Diam. 20 x 58 mm
Load when parked	75 kg
	0.35 kg
	EWP 525 / GiBo 525
	12

SAP: RAD 200X 50 VOLLMG 200FK**Wheel 200 V**

Part no.	294364 (<i>W 5420</i>)
Wheel	200 x 50 mm, solid rubber
Rim	Plastic
Hub	Diam. 20 x 58 mm
Load when parked	200 kg
	1.26 kg
	EWP 630 / GiBo 500
	12

**SAP:** RAD 200 VB 200X 50 VOLLMG**Wheel 200 VB**

Part no.	294365 (<i>W 5422</i>)
Wheel	200 x 50 mm, solid rubber
Rim	steel
Hub	Diam. 20 x 58 mm
Load when parked	200 kg
	1.45 kg
	EWP 500 / GiBo 500
	12

**SAP:** RAD 200 VBB**Wheel 200 VBB**

Part no.	1860506 (<i>W 5424</i>)
Wheel	200 x 60 mm, solid rubber
Rim	steel
Hub	Diam. 20 x 58 mm
Load when parked	250 kg
	1.77 kg
	EWP 500 / GiBo 400
	12

**SAP:** RAD 255 S 225X 70 VOLLMG**Wheel 255 S**

Part no.	1223374 (<i>W 5450</i>)
Wheel	225 x 70 mm, solid rubber
Rim	Plastic
Hub	Diam. 20 x 88 mm
Load when parked	250 kg
	1.93 kg
	EWP 200 / GiBo 200
	12

**SAP:** RAD 255 SB 225X 70 VOLLMG ST-FELGE**Wheel 255 SB**

Part no.	1223522 (<i>W 5452</i>)
Wheel	225 x 70 mm, solid rubber
Rim	steel
Hub	Diam. 20 x 88 mm
Load when parked	400 kg
	2.23 kg
	EWP 200 / GiBo 200
	12

**SAP: RAD 215X 65 KUNSTSTOFF****Wheel 240 S**

Part no.	1211567 (<i>W 5446</i>)
Wheel	215 x 70 mm, rubber
Rim	Plastic
Hub	Diam. 20 x 88 mm
Load when parked	150 kg
	0.91 kg
	EWP 200 / GiBo 200
	12

**SAP: RAD 260 L****Wheel 260 L**

Part no.	1860513 (<i>W 5430</i>)
Wheel	260 x 85 mm, air
Rim	Plastic
Hub	Diam. 20 x 88 mm
Load when parked	200 kg
	0.93 kg
	EWP 130 / GiBo 130
	12

**SAP: RAD 260 LB****Wheel 260 LB**

Part no.	1860594 (<i>W 5432</i>)
Wheel	260 x 85 mm, air
Rim	steel
Hub	Diam. 20 x 88 mm
Load when parked	200 kg
	1.18 kg
	EWP 110 / GiBo 130
	12

**SAP: RAD 255 VB****Wheel 255 VB**

Part no.	1860512 (<i>W 5473</i>)
Wheel	255 x 80 mm, solid rubber
Rim	steel
Hub	Diam. 20 x 88 mm
Load when parked	500 kg
	3.81 kg
	EWP 180 / GiBo 180
	12

**SAP: RAD 250 VBR****Wheel 250 VBR**

Part no.	1860509 (<i>W 5472</i>)
Wheel	250 x 60 mm, solid rubber
Rim	steel
Hub	Diam. 25 x 75 mm
Load when parked	400 kg
	3.51 kg
	EWP 150 / GiBo 150
	12

**SAP: RAD 400 VBR****Wheel 400 VBR**

Part no.	1860518 (<i>W 5480</i>)
Wheel	400 x 60 mm, solid rubber
Rim	steel
Hub	Diam. 25 x 88 mm
Load when parked	500 kg
	7.50 kg
	EWP 50 / GiBo 50
	12

Spare parts for jockey wheels ST, K and VK**SAP: PREMIUM-CAP WW SCHWARZ****Crank cover PREMIUM CAP**

Part no.	1860473 (<i>W 6350</i>)
suitable for	ST 60, ST 60-V, K 60, VK 60
	0.04 kg
	–
	12