


811040

Inhaltsverzeichnis

Overrun device V 161S reinforced design (811040)	3
--	---

Overrun device V 161S reinforced design (811040)

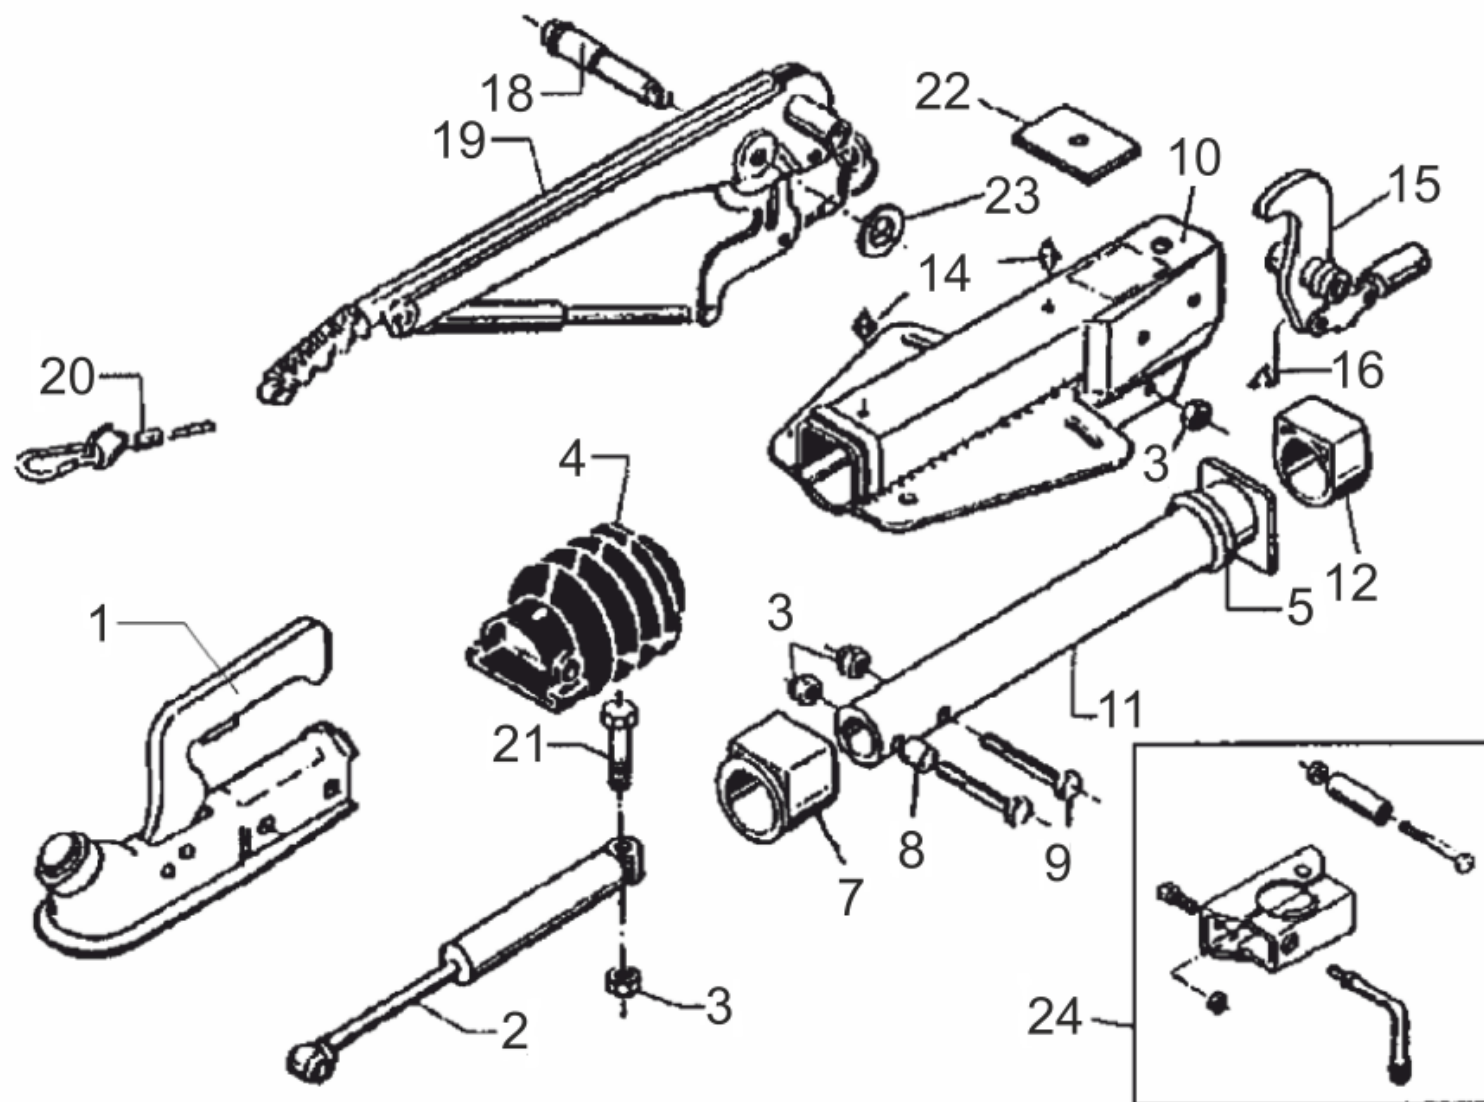

Overrun device V 161S reinforced design (811040)

Item no.	Article no.	Description	Quantity	Unit	Remark
1	ETK0001	Ball coupling	1	PC	Purchase order by the type without fixing material.
2	1217333	Shock absorber 161S reinforced with bush	1	PC	
3	705526	hexnut M12 DIN 985-10	3	PC	For safety reasons: Self locking nuts and screws with chemical self locking must be used once. After untighten always use a new part.
4	366356	Bellows	1	PC	
5	371372	Damping rubber	1	PC	
6	353943	Flanged bush	1	PC	Attention: After fitting the bearing bushes must be reamed to the particular draw bar diameter
7	357242	Distance bush	1	PC	
8	701249	Hexagon screw M12x75 DIN 931 8.8 zp	1	PC	
9	ETK0002	Housing	1	PC	At the time of order see graved drawing-no.
10	571874	Draw tube welded 251S	1	PC	
11	353942	Plain bearing bush	1	PC	Attention: After fitting the bearing bushes must be reamed to the particular draw bar diameter

Overrun device V 161S reinforced design (811040)

Item no.	Article no.	Description	Quantity	Unit	Remark
12	375900	Conical grease nipple AS 8x1 DIN 71412	1	PC	
13	380265	Deflection lever cpl. iH=90:27	1	PC	
14	700203	Conical grease nipple AS 6x1 DIN 71412	1	PC	
15	581145	Bearing screw M12x100 Ø19	1	PC	
16	220096	Hand brake lever incl. brake away cable 161S-251S-161R	1	PC	Incl. gas spring, brake away cable and brake away ring
17	368605	Breakaway cable 950 mm length	1	PC	
18	700312	Hexagon screw M12x90 DIN 931 8.8 zp	1	PC	
19	581699	Stop plate	1	PC	
20	370693	Washer Ø19x34x3	1	PC	
24	293020	Jockey wheel clamp for tube Ø48 161/251	1	PC	Retrofit kit can optionally be attached