
AL-KO VT
VEHICLE TECHNOLOGY

# 811924

# Inhaltsverzeichnis

Overrun device 270VB BASIC with handle (811924) 3

# Overrun device 270VB BASIC with handle (811924)

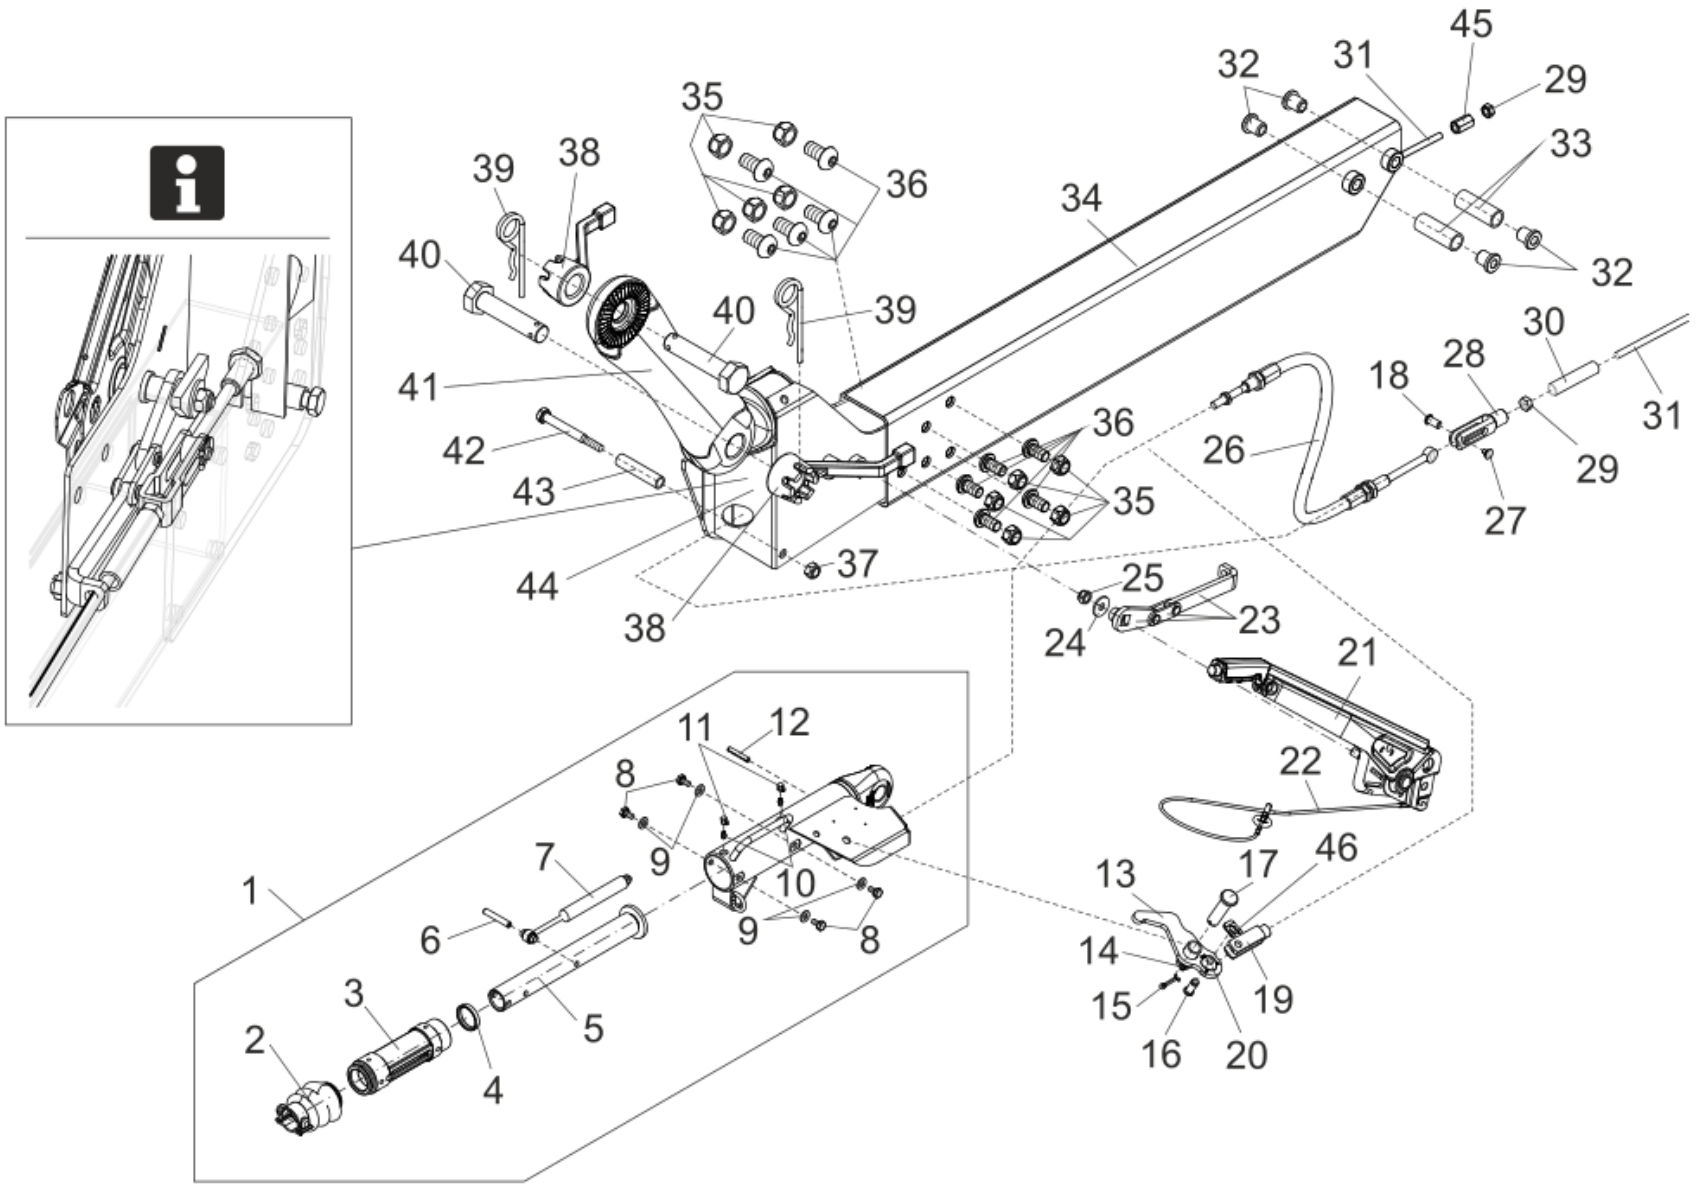

# Overrun device 270VB BASIC with handle (811924)

| Item no. | Article no. | Description | Quantity | Unit | Remark |
|---|---|---|---|---|---|
| 1 | 1809995 | Overrun device 270VB BASIC with handle | 1 | PC | Surface coating: electrolytically galvanised |
| 1 | 1809996 | Overrun device 270VB BASIC with handle | 1 | PC | Surface coating: black primed |
| 2 | 366356 | Bellows | 1 | PC | |
| 3 | 1376762 | Bearing cartridge | 1 | PC | |
| 4 | 371372 | Damping rubber | 1 | PC | |
| 5 | 694938 | Draw tube welded | 1 | PC | |
| 6 | 701256 | snap hook 12x75 DIN 1481 | 1 | PC | |
| 7 | 1206342 | Shock absorber 270VB | 1 | PC | |
| 8 | 706377 | Hexagon screw M12x20 DIN 933 8.8 | 4 | PC | |
| 9 | 706300 | Washer 12 DIN 1440 | 4 | PC | |
| 10 | L2035820 | Grease nipple AM8X1 Kegel DIN 71412 | 2 | PC | |
| 11 | L13995115 | Cap | 2 | PC | |
| 12 | 1548013 | snap hook 10x60 DIN 1481 | 1 | PC | |
| 13 | 694932 | Deflection lever welded | 1 | PC | |
| 14 | 700203 | Conical grease nipple AS 6x1 DIN 71412 | 1 | PC | |
| 15 | 701035 | Split pin 4x28 DIN 94 | 1 | PC | |
| 16 | 625761 | Bolt | 1 | PC | |
| 17 | 706520 | Bolt B16 H11x65X59,0 EN2341 | 1 | PC | |
| 18 | 1808986 | Screw M6 with shoulder | 1 | PC | Secured with Loctite 270 |

Pos. 8 with Loctite 243 securde, tightening torque 70Nm

# Overrun device 270VB BASIC with handle (811924)

| Item no. | Article no. | Description | Quantity | Unit | Remark |
|---|---|---|---|---|---|
| 19 | 1368206 | Fork head 10X45 DIN 71752 at drawing | 1 | PC | |
| 20 | 647241 | Triangle segment for deflection lever | 1 | PC | |
| 21 | 694931 | Hand brake lever incl. brake away cable 160/270VB BASIC | 1 | PC | |
| 22 | 368605 | Breakaway cable with hooks 950 mm length for common commercial trailers | 1 | PC | |
| 23 | 694927 | Deflection lever cpl. VB-BASIC | 1 | PC | |
| 24 | 705494 | washer 10,5 DIN 9021-ST | 1 | PC | |
| 25 | 705519 | hexnut M10 DIN 985-10 | 1 | PC | For safety reasons: Self locking nuts and screws with chemical self locking must be used once. After untighten always use a new part. |
| 26 | 1231867 | bowden cable with threaded bolt M10 / drawbar | 1 | PC | |
| 27 | 1808987 | Bearing bolt | 1 | PC | Secured with Loctite 270 |
| 28 | 1808985 | Fork head welded | 1 | PC | |
| 29 | 705378 | Hexnut M10 DIN 934-8 | 1 | PC | |
| 30 | 1564576 | Bush Ø18,0x2,5 x105 | 1 | PC | |
| 31 | 353314 | Brake rod M10x1150 | 1 | PC | |
| 32 | 1311914 | Flanged bush 252/353VB-2 | 4 | PC | |
| 33 | 1311910 | Bush Ø32x3,5x89 | 2 | PC | |
| 34 | ETK0022 | Drawbar | 1 | PC | Drawbar customized - represent length |

Pos. 8 with Loctite 243 securde, tightening torque 70Nm

# Overrun device 270VB BASIC with handle (811924)

| Item no. | Article no. | Description | Quantity | Unit | Remark |
|---|---|---|---|---|---|
| | | | | | and type by purchase order |
| 35 | 706013 | hexnut M16 DIN 985-10 | 10 | PC | For safety reasons: Self locking nuts and screws with chemical self locking must be used once. After untighten always use a new part. |
| 36 | 1800040 | Flat head screw M16x30 ISO 7380 8.8 | 10 | PC | |
| 37 | 705526 | hexnut M12 DIN 985-10 | 1 | PC | For safety reasons: Self locking nuts and screws with chemical self locking must be used once. After untighten always use a new part. |
| 38 | 1800035 | Clamp handle M27x1,5 | 2 | PC | |
| 39 | 604103 | Spring cotter pin with chain | 2 | PC | |
| 40 | 1800083 | Bearing screw M27x1,5x118 | 2 | PC | |
| 41 | 1548007 | Spacer side arm 160/270VB | 1 | PC | |
| 42 | 705420 | Hexagon screw M12x110 DIN 931 8.8 | 1 | PC | |
| 43 | 603756 | Bush Ø18,0x2,5 x77 | 1 | PC | |
| 44 | 1548008 | Adapter 270VB black painted | 1 | PC | |
| 44 | 1656676 | Adapter 270VB electrolytically galvanised | 1 | PC | |
| 45 | 706154 | Hexnut M 10 3D DIN 6334 | 1 | PC | |
| 46 | 706336 | Lock washer SL 10 SXN 08 | 1 | PC | |

Pos. 8 with Loctite 243 securde, tightening torque 70Nm